

# Significant intersections reinforce potential for a gold porphyry discovery at Colorado V Gold Project, Ecuador

## Highlights

- Results confirm the potential for major gold porphyry discovery (refer Table 1):
  - 385 metres of mineralisation in the main Humedo Adit including **112 metres at 0.6 g/t AuEq<sup>4</sup>** and **52 metres at 0.7 g/t AuEq<sup>4</sup>** on the flank of the main Au-Cu soil Anomaly
  - **248 metres at 0.5 g/t AuEq<sup>4</sup>** including **114 metres at 0.7 g/t AuEq<sup>4</sup>**, from surface, in drillhole ZK16-2 located on the northwest flank of the main Au-Cu soil Anomaly
  - **112 metres at 0.5 g/t AuEq<sup>4</sup>** within a zone of **454m at 0.3 g/t AuEq<sup>4</sup>** over the entire length of drillhole ZK0-4 located on the southern boundary of the main Au-Cu soil Anomaly
- Results are from the margins of regionally significant Au-Cu soil anomalies with grades now shown to increase towards the centre of the anomalies which are yet to be drill tested.
- The two main Au-Cu soil anomalies have the same geology, grades, and surface footprint as the Tier 1 Cangrejos Gold Project<sup>1</sup> located five kilometres to the northeast.
- Recently acquired airborne magnetic data confirms these large Au-Cu anomalies are coincident with significant underlying magnetic anomalies indicative of porphyry systems.
- All drill holes within the two main 1 kilometre long Au-Cu soil anomalies have returned significant mineralisation with drilling to test the centre of the anomalies early next year.
- The results confirm the Company's strategy of large tonnage gold projects in Ecuador that will be carried by the Company's high-grade Hualilan Gold project in Argentina.

## Commenting on the results, CEL Managing Director, Mr Kris Knauer, said

*"These results significantly upgrade our high-priority porphyry targets in Ecuador where historical drilling on the margins of significant gold-copper soil anomalies has encountered ore grade mineralisation from surface to 450 metres.*

*Grades are now confirmed to be improving towards the centres of these 1 kilometre long anomalies which remain undrilled. Additionally, our recently acquired magnetic data shows coincident magnetic anomalies indicative of porphyry systems.*

*This reinforces our strategy of a large scale bulk-gold project in Ecuador which is underwritten by our flagship, high-grade, Hualilan Gold project in Argentina which remains our primary focus."*

<sup>1</sup> Source Lumina Gold NI 43-101 Technical Report Cangrejos Project July 2020

**Challenger Exploration (ASX: CEL)** (“**CEL**” or the “**Company**”) is pleased to announce the results from its initial 454 metres of rock-saw channel sampling along the main Humedo Adit at Colorado V and three additional drill holes from the Colorado V concession in Ecuador.

The main Humedo Adit and the drill holes are located adjacent to a series of regionally significant gold and copper soil anomalies believed to be above intrusive porphyry-style targets. The Company's recently acquired airborne magnetic data, which is currently being processed, confirms that these large Au-Cu soil anomalies are coincident with significant underlying magnetic anomalies indicative of porphyry systems.

None of the historical drill holes fully tested the Au-Cu soil anomalies as they were collared outside of the soil anomalies and, at best, only tested the outer edges of the anomalies (see Figure 1). Similarly, the main Humedo Adit at Colorado V only cuts the western edge of the largest Au-Cu soil anomaly (Anomaly A).

Channel sampling in the Main adit, and new assays from historical drill core samples, returned significant ore grade intersections from surface down to 450 metres. Importantly, the results returned the highest grades closest to the centre of the main Au-Cu soil Anomaly A. Anomaly A is 1.2 kilometres in length and remains untested with the historical drill holes only cutting the western edge of anomaly. The Humedo Mine adit, while still on the western edge of Anomaly A, represents the nearest sampling to the centre of the anomaly. The first 62 metres of the adit, which returned the highest grades of **62 metres at 0.8 g/t AuEq** (0.6 g/t gold, 2.7 g/t silver, 848 ppm copper, 10.4 ppm molybdenum), is the nearest section of the Adit to the centre of Anomaly A.

Management believes the results materially upgrade the main Au-Cu soil anomalies (Anomaly A and Anomaly B) as compelling drill targets with significant scale. The mineralisation and grades encountered in the Humedo Mine Adit and the historical drill holes is analogous to the 17 million-ounce Cangrejos Project<sup>1</sup> located 5 kilometres away. Additionally, the surface extent of the Anomaly A and Anomaly B is similar to that of the Cangrejos deposit and of sufficient size to host a major gold discovery.

Assays from a second phase of 340 metres of channel sampling in Humedo Mine, and the newly discovered Cuenca Mine (within Anomaly A), located 450 metres south-east of the Humedo Mine, are pending. Several additional historical drill holes have been logged, sampled and submitted for assaying.

## **Discussion**

### **Humedo Adit Channel Sampling**

The main Humedo Adit is 430 metres long and provides access to a 500-metre northwest-southeast trend currently being exploited by small scale underground mining. The Main adit cuts the western flank of Anomaly A, the largest of a series of coincident gold, copper and molybdenum soil anomalies believed to represent porphyry targets (Figure 1 over the page).

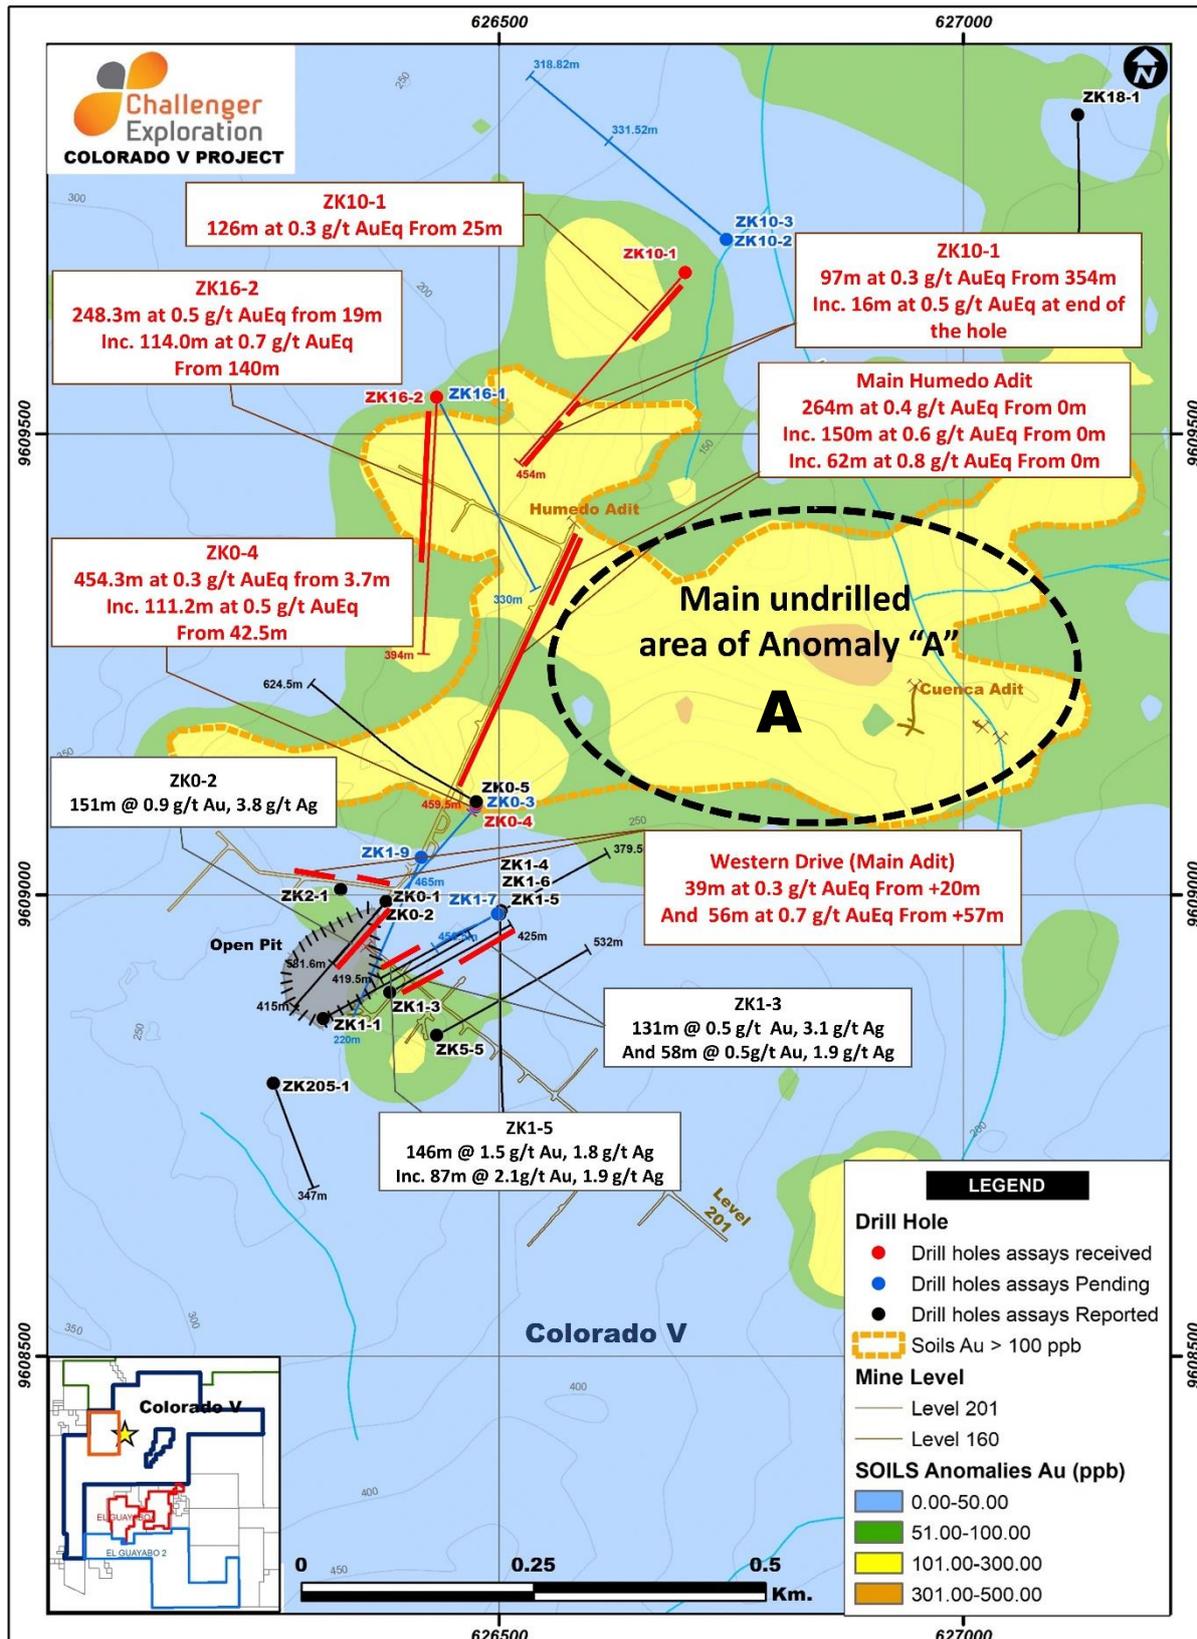


Figure 1 : Showing location of drilling and channel sampling over Anomaly A (>100ppb gold in soil)

Channel sampling of the main Humedo Adit at Colorado V was undertaken during October 2020. The sampling was conducted using a rock saw to cut a continuous channel in the wall of the Adit, which was sampled, logged, and assayed in the same manner, and with the same QAQC standards, as drill core. The channels are designed to provide a representative sample of the wall which is approximately the same size and weight as a drill core sample. Assay results from these samples are expected to be able to be utilised in any future resource estimates.

The channel sampling was undertaken continuously from surface at the Humedo Mine adit entrance to 310 metres along the SW trending main Humedo Adit with another 146 metres sampled from the Western Drive located at the end of Humedo Adit from +430 to +576 metres.

The main Humedo Adit returned 385 metres of mineralisation from the 456 metres rock saw sampled. The northern section of the adit returned **264 metres at 0.4 g/t AuEq** (0.3 g.t gold, 2.1 g/t silver, 512 ppm copper, 9.4 ppm molybdenum) including **112 metres at 0.7 g/t AuEq** (0.6 g.t gold, 2.7 g/t silver, 784 ppm copper, 9.4 ppm molybdenum) plus **32 metres at 0.3 g/t AuEq** (0.2 g.t gold, 1.4 g/t silver, 366 ppm copper, 5.1 ppm molybdenum). This mineralisation is located at the western edge of the largest Au-Cu soil anomaly, Anomaly A (Figure 1).

The Humedo Adit, while located on the western flank of Anomaly A, is the nearest point sampled to the centre of Anomaly A, with the northern section (top) of the adit the closest to the centre of Anomaly A. The top of the adit returned the highest-grade intersection to date in Anomaly A recording **62 metres at 0.8 g/t AuEq** (0.6 g/t gold, 2.7 g/t silver, 848 ppm copper, 10.4 ppm molybdenum).



Photos showing the main Humedo Adit and channel sample in the wall of the adit

Channel sampling of the Western Drive from the end of the main Humedo Adit returned **39.1 metres at 0.3 g/t AuEq** (0.3 g.t gold, 2.3 g/t silver, 280 ppm copper, 4.5 ppm molybdenum) and **56 metres at 0.7 g/t AuEq** (0.6 g.t gold, 1.8 g/t silver, 125 ppm copper, 3.0 ppm molybdenum). This mineralisation is located well outside Anomaly A, is associated with antimony and bismuth, and has low associated copper and molybdenum similar to the main zone of mineralisation currently being exploited underground. This mineralisation is interpreted as an extension of the main Humedo Mine, which was intersected in drill hole ZK0-2 (151m @ at 0.9 g/t Au, 3.8 g/t Ag - previously reported) a further 100 metres to the west along strike in an area of limited historical drilling.

### Historical drill holes

The drill holes are from a series of 60 historical holes drilled by CEL's farm-in partner at Colorado V, targeting extensions to narrow high-grade vein hosted gold mineralisation they are currently exploiting. These historical drill holes were not systematically logged or assayed for bulk tonnage gold or base metal mineralisation, as the focus of the current owner of Colorado V is supplying high grade feed to their existing processing plant.

The drill holes reported were drilled adjacent to a series of regionally significant gold-copper-molybdenum soil anomalies. These anomalies have significant scale with the plus 100 ppb gold footprint of both Anomaly A and B being over 1 kilometre long and 350-500 metres wide (Figure 1 and 2).

The anomalies had been interpreted to be targets for porphyry mineralisation prior to the assaying of the historical drill holes. As can be seen from Figure 1 and 2, none of the historical drill holes test the centre of the soil anomalies with the majority of the drill holes testing areas away from the anomalies. Those holes which did penetrate the anomalies only drilled into their outer edges.

### Drill hole ZK16-2

Drill hole ZK16-2 was collared to the north of Anomaly A and drilled south into the western margin of Anomaly A before tracking outside of the anomaly. The hole returned a broad zone of significant mineralisation of **248.3 metres at 0.5 g/t AuEq** (0.3 g.t gold, 2.7 g/t silver, 686 ppm copper, 2.6 ppm molybdenum) including **114 metres at 0.7 g/t AuEq** (0.5 g.t gold, 2.9 g/t silver, 926 ppm copper, 3.4 ppm molybdenum) with a higher-grade zone of **30.0 metres at 1.1 g/t AuEq** (0.9 g.t gold, 3.6 g/t silver, 1157 ppm copper, 3.4 ppm molybdenum).

The mineralisation encountered in ZK16-2, similar to all of the reported results, correlates extremely well with the Au-Cu soil anomalies. The broad zone of ore grade mineralisation encountered in this hole confirms the potential for ore grade mineralisation to be present throughout the entire footprint of the series of regionally significant Au-Cu soil anomalies.

### Drill hole ZK10-1

Drill hole ZK10-1 was collared outside of the main Au-Cu soil anomaly A and drilled into the north-west corner of the anomaly. The hole recorded two broad intercepts of **126m at 0.3 g/t AuEq** from 25m and **115 metres at 0.3 g/t AuEq** from 309m. As can be seen on **Figure 1** these two mineralised zones correlate with the plus 100 ppb gold in soil anomaly. The end of hole is nearest the centre of Au-Cu soil Anomaly A, with the last 15 metres of the hole returning the highest grades recording 15 metres at **0.5 g/t AuEq**, ending in mineralisation.

### Drill hole ZK0-4

Drill hole ZK0-4 intersected significant mineralisation over the entire length of the hole returning **454m at 0.3 g/t AuEq** (0.2 g.t gold, 1.3 g/t silver, 399ppm copper, 5.9 ppm molybdenum) including **112m at 0.5 g/t AuEq** (0.4 g.t gold, 1.9 g/t silver, 504 ppm copper, 7.6 ppm molybdenum). The hole was collared at the extreme southern edge of Anomaly A and drilled vertically, affirming the potential for ore grade mineralisation to be present throughout the entire footprint of the Au-Cu soil anomalies.



Drill hole (#)		From (m)	Total (m)	AuEq (g/t)	Au (g/t)	Ag (g/t)	Cu (%)	Mo ppm	Comment
Main Adit	from	0.0	264.0	0.4	0.3	2.1	0.1	9.4	0.1 g/t AuEq cut off
	inc	0.0	150.0	0.6	0.5	2.4	0.1	9.8	0.5 g/t AuEq cut off
	inc	0.0	112.0	0.7	0.6	2.7	0.1	9.3	1 g/t AuEq cut off
	and	276.0	32.0	0.3	0.2	1.4	0.0	5.1	0.1 g/t AuEq cut off
Main Adit West Drive	from	20.0	39.1	0.3	0.3	2.3	0.0	4.5	0.1 g/t AuEq cut off
	and	74.0	56.0	0.7	0.6	1.8	0.0	2.8	0.5 g/t AuEq cut off
		84.0	46.0	0.8	0.8	2.1	0.0	2.8	1.0 g/t AuEq cut off
ZK0-4	from	3.7	454.3*	0.3	0.2	1.3	0.0	5.9	ends in mineralisation
	inc	42.6	111.7	0.5	0.4	1.9	0.1	7.6	0.5 g/t AuEq cut off
	inc	69.7	27.5	0.8	0.7	1.6	0.1	8.6	1.0 g/t AuEq cut off
ZK10-1	from	25.0	126	0.3	0.2	1.1	0.1	17.9	0.1 g/t AuEq cut off
	and	309	15	0.3	0.2	0.9	0.1	6.1	0.1 g/t AuEq cut off
	and	354	97.0*	0.3	0.2	1.2	0.1	15.8	ends in mineralisation
	inc		16.0*	0.5	0.3	1.8	0.1	2.6	ends in mineralisation
ZK16-2	from	19.0	248.3	0.5	0.3	2.7	0.1	2.6	0.1 g/t AuEq cut off
	inc	140.0	114.0	0.7	0.5	2.9	0.1	3.3	0.5 g/t AuEq cut off
	inc	224.0	30.1	1.1	0.9	3.6	0.1	3.4	1.0 g/t AuEq cut off

**Table 1: Assay results from Colorado V assaying program**

- (1) Drill collar locations, hole dip and direction are available in this ASX Release see- JORC Table 1 Section 1
- (2) Results are reported using a cut-off of 0.1 g/t Au with up to 10 metres of internal dilution.
- (3) Inclusive (incl) Intercepts use a cut-off of 0.5 g/t Au with up to 10 metres of internal dilution and 1 g/t Au
- (4) See below for information regarding AuEq's reported under the JORC Code

#### <sup>4</sup> Gold Equivalent (AuEq) values - Requirements under the JORC Code

- Assumed commodity prices for the calculation of AuEq is Au US\$1897 Oz, Ag US\$24.3 Oz, Cu US\$6,546 /t, Mo \$17,852t
- Metallurgical recoveries for Au, Ag, Cu, Mo are assumed to be the same
- The formula used:  $AuEq (g/t) = Au (g/t) + Ag (g/t) \times 0.1281 + Cu (\%) \times 1.5967 + Mo (\%) \times 4.35449$
- CEL confirms that it is the company's opinion that all the elements included in the metal equivalents calculation have a reasonable potential to be recovered and sold

This announcement was approved by the board.

#### For further information contact:

**Kris Knauer**  
Managing Director  
+61 411 885 979

kris.knauer@challengerex.com

**Scott Funston**  
Chief Financial Officer  
+61 413 867 600

scott.funston@challengerex.com

**Media Enquiries**  
**Jane Morgan**  
+ 61 405 555 618

jm@janemorganmanagement.com.au

Previous announcements referred to in this release include:

27 May 2020 - CEL Confirms Discovery of Large-Scale Gold System

6 Jul 2020 - Colorado V Gold Project Assay Results Reinforce the Discovery of a Large-Scale Gold System

21 Aug 2020 - CEL identifies transformational drill targets at Colorado V Gold Project

## About Challenger Exploration

Challenger Exploration Limited's (ASX: CEL) aspiration is to become a globally significant gold producer. The Company is developing two complementary gold/copper projects in South America. The strategy for the Hualilan Gold project is for it to provide a high-grade low capex operation in the near term. This underpins CEL with a low risk, high margin source of cashflow while it prepares for a much larger bulk gold operation in Ecuador.

- Hualilan Gold Project**, located in San Juan Province Argentina, is a near term development opportunity. It has extensive historical drilling with over 150 drill-holes and a non-JORC historical resource <sup>(2)</sup> of 627,000 Oz @ 13.7 g/t gold which remains open in most directions. The project was locked up in a dispute for the past 15 years and as a consequence had seen no modern exploration until CEL acquired the project in 2019. Results from CEL's first drilling program included 6.1m @ 34.6 g/t Au, 21.9 g/t Ag, 2.9% Zn, 6.7m @ 14.3 g/t Au, 140 g/t Ag, 7.3% Zn and 10.3m @ 10.4 g/t Au, 28 g/t Ag, 4.6% Zn. This drilling intersected high-grade gold over almost 2 kilometres of strike and extended the known mineralisation along strike and at depth in multiple locations. Recent drilling has demonstrated this high-grade skarn mineralisation is underlain by a significant intrusion-hosted gold system with intercepts including 116m at 1.0 g/t Au, 4.0 g/t Ag, 0.2% Zn and 39.0m at 5.5 g/t Au, 2.0 g/t Ag, 0.3% Zn in porphyry dacites. CEL's current program includes 45,000 metres of drilling, metallurgical test work of key ore types, and an initial JORC Compliant Resource which will allow an economic review.
- El Guayabo Gold/Copper Project** covers 35 sqkms in southern Ecuador and was last drilled by Newmont Mining in 1995 and 1997 targeting gold in hydrothermal breccias. Historical drilling has demonstrated potential to host significant gold and associated copper and silver mineralisation. Historical drilling has returned a number of intersections including 156m @ 2.6 g/t Au, 9.7 g/t Ag, 0.2% Cu and 112m @ 0.6 % Cu, 0.7 g/t Au, 14.7 g/t which have never been followed up. The Project has multiple targets including breccia hosted mineralisation, an extensive flat lying late-stage vein system and an underlying porphyry system target neither of which has been drill tested. CEL's first results confirm the discovery of large-scale gold system with over 250 metres of bulk gold mineralisation encountered in drill hole ZK-02 which contains a significant high-grade core of 134m at 1.0 g/t gold and 4.1 g/t silver including 63m at 1.6 g/t gold and 5.1 g/t silver.

## Foreign Resource Estimate Hualilan Project

La Mancha Resources 2003 foreign resource estimate for the Hualilan Project <sup>^</sup>			
Category	Tonnes (kt)	Gold Grade (g/t)	Contained Gold (koz)
Measured	218	14.2	100
Indicated	226	14.6	106
<b>Total of Measured &amp; Indicated</b>	<b>445</b>	<b>14.4</b>	<b>206</b>
Inferred	977	13.4	421
<b>Total of Measured, Indicated &amp; Inferred</b>	<b>1,421</b>	<b>13.7</b>	<b>627</b>

<sup>^</sup> Source: La Mancha Resources Toronto Stock Exchange Release dated 14 May 2003 -Independent Report on Gold Resource Estimate. Rounding errors may be present. Troy ounces (oz) tabled here

<sup>#1</sup> For details of the foreign non-JORC compliant resource and to ensure compliance with LR 5.12 please refer to the Company's ASX Release dated 25 February 2019. These estimates are foreign estimates and not reported in accordance with the JORC Code. A competent person has not done sufficient work to clarify the foreign estimates as a mineral resource in accordance with the JORC Code. It is uncertain that following evaluation and/or further exploration work that the foreign estimate will be able to be reported as a mineral resource. The company is not in possession of any new information or data relating to the foreign estimates that materially impact on the reliability of the estimates that materially impacts on the reliability of the estimates or CEL's ability to verify the foreign estimates estimate as minimal resources in accordance with Appendix 5A (JORC Code). The company confirms that the supporting information provided in the initial market announcement on February 25, 2019 continues to apply and is not materially changed

### Competent Person Statement – Exploration Results and Exploration Target

The information that relates to sampling techniques and data, exploration results and geological interpretation and Exploration Targets has been compiled Dr Stuart Munroe , BSc (Hons), PhD (Structural Geology), GDip (AppFin&Inv) who is a full-time employee of the Company. Dr Munroe is a Member of the AusIMM. Dr Munroe has over 20 years' experience in the mining and metals industry and qualifies as a Competent Person as defined in the JORC Code (2012).

Dr Munroe has sufficient experience of relevance to the styles of mineralisation and the types of deposits under consideration, and to the activities undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results. Dr Munroe consents to the inclusion in this report of the matters based on information in the form and context in which it appears. The Australian Securities Exchange has not reviewed and does not accept responsibility for the accuracy or adequacy of this release.

### Competent Person Statement – Foreign Resource Estimate

The information in this release provided under ASX Listing Rules 5.12.2 to 5.12.7 is an accurate representation of the available data and studies for the material mining project. The information that relates to Mineral Resources has been compiled by Dr Stuart Munroe , BSc (Hons), PhD (Structural Geology), GDip (AppFin&Inv) who is a full-time employee of the Company. Dr Munroe is a Member of the AusIMM. Dr Munroe has over 20 years' experience in the mining and metals industry and qualifies as a Competent Person as defined in the JORC Code (2012).

Dr Munroe and has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration to qualify as Competent Person as defined in the 2012 Edition of the JORC Code for Reporting of, Mineral Resources and Ore Reserves. Dr Munroe consents to the inclusion in this report of the matters based on information in the form and context in which it appears. The Australian Securities Exchange has not reviewed and does not accept responsibility for the accuracy or adequacy of this release.

## JORC Code, 2012 Edition – Table 1 report template

### Section 1 Sampling Techniques and Data -El Guayabo Project

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>- Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>- Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>- In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>• Newmont Mining Corp (NYSE: NEM) ("<b>Newmont</b>") and Odin Mining and Exploration Ltd (TSX: ODN) ("<b>Odin</b>") core drilled the property between February 1995 and November 1996 across two drilling campaigns.</li> <li>• The sampling techniques were reviewed as part of a 43-101 Technical report on Cangrejos Property which also included the early results of the El Joven joint venture between Odin and Newmont, under which the work on the El Guayabo project was undertaken. This report is dated 27 May 2004 and found the sampling techniques and intervals to be appropriate with adequate QA/QC and custody procedures, core recoveries generally 100%, and appropriate duplicates and blanks use for determining assay precision and accuracy.</li> <li>• Duplicates were prepared by the Laboratory (Bonder Cleg) which used internal standards. Newmont also inserted its own standards at 25 sample intervals as a control on analytical quality</li> <li>• Diamond drilling produced core that was sawed in half with one half sent to the laboratory for assaying per industry standards and the remaining core retained on site.</li> <li>• Cu assays above 2% were not re-assayed using a technique calibrated to higher value Cu results hence the maximum reported assay for copper is 2%.</li> <li>• All core samples were analysed using a standard fire assay with atomic absorption finish on a 30 g charge (30 g FAA). Because of concerns about possible reproducibility problems in the gold values resulting from the presence of coarse gold, the coarse crusher rejects for all samples with results greater than 0.5 g/t were re-assayed using the "blaster" technique - a screen type fire analysis based on a pulverized sample with a mass of about 5 kg. Samples from most of these intersections were also analysed for Cu, Mo, Pb, Zn and Ag.</li> <li>• CEL has re-sampled sections of the Newmont and Odin drill core. ¼ drill core was cutover intervals that replicated the earlier sampling. Sample intervals ranged from 0.7 – 4.5m with an average of 2.0m. 533 samples totaling 1,094.29m were collected. Sampling was done for Au analysis by fire assay of a 30g charge and 43 element 4-acid digest with ICP_AES determination.</li> <li>• Field mapping (creek traverse) by CEL includes collection of rock chip samples for assay for Au by fire assay (50g) with AAS determination and gravimetric determination for values &gt; 10 g/t Au and assay for 48 elements by 4-acid digest with ICP-MS determination. Rock chip samples are taken so as to be as representative as possible of the exposure being mapped.</li> </ul> <p><b>Colorado V:</b></p>

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>• Soil sampling: A database of 4,495 soil analyses has been provided by Goldking Mining Company S.A. (GK) which has yet to be fully evaluated. No information has been provided on the method of sample collection or assay technique. The soil analyses include replicate samples and second split analyses. Pulps have been securely retained by Goldking Mining Company and have been made available to CEL for check assaying. Check assaying is planned, including collection of field duplicates.</li> <li>• Rock chip sampling during regional mapping has been done on selected exposures. Sampling involves taking 2-3 kg of rock using a hammer from surface exposures that is representative of the exposure.</li> <li>• Selected intervals of drill core have been cut longitudinally and half core are were submitted for gold determination at GK's on-site laboratory prior to CEL's involvement with the Project.</li> <li>• Re-sampling of the core involves taking ¼ core (where the core has previously been sampled) or ½ core (where the core has not previously been sampled). The core is cut longitudinally and sample intervals of 1 – 3 meters have been collected for analysis. ZK0-1 and ZK1-3 have been analysed for of gold by fire assay (30g) wit ICP determination and other elements by 4 acid digest with ICP-AES finish (36 elements) at SGS del Peru S.A.C. SAZK0-1, SAZK0-2, SAZK2-1, ZK0-2, ZK0-5, ZK1-5, ZK1-6, ZK2-1, ZK3-1, ZK3-4, ZK13-1 and ZK18-1 have been analysed for of gold by fire assay (30g) with ICP determination and other elements by 4 acid digest with combined ICP-AES and ICP-MS finish (50 elements) at SGS del Peru S.A.C. Samples from other holes have been analysed for gold by fire assay (30g) with ICP determination and overlimit (&gt;10 g/t Au) by fire assay with gravimetric determination and other elements by 4-acid digest with ICP-MS (48 elements) at ALS Laboratories in Peru.</li> <li>• Underground development has been mapped and channel sampled. Channel samples have been taken by cutting a horizontal channel of approximately 5 cm width and 4 cm depth into the walls at a nominal height of 1m above the ground. The channel cuts were made with an angle grinder mounted with a diamond blade. Samples were extracted from the channel with a hammer and chisel to obtain a representative sample with a similar weight per metre as would be obtained from a drill core sample. Analysis of the samples has been done by ALS Laboratories in Peru using the same preparation and analysis as has ben used for drill core samples.</li> </ul>
<b>Drilling techniques</b>	<p>- <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>• Diamond core drilling HQ size from surface and reducing to NQ size as necessary. The historical records do not indicate if the core was oriented</li> </ul> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>• Diamond drilling was done using a rig owned by GK. Core size collected includes HQ, NQ2 and NQ3. There is no indication that oriented core was recovered.</li> </ul>

Criteria	JORC Code explanation	Commentary												
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>- Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>- Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>- Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>• In a majority of cases core recovery was 100%.</li> <li>• In the historical drill logs where core recoveries were less than 100% the percentage core recovery was noted.</li> <li>• No documentation on the methods to maximise sample recovery was reported in historical reports however inspection of the available core and historical drilling logs indicate that core recoveries were generally 100% with the exception of the top few metres of each drill hole.</li> <li>• No material bias has presently been recognised in core.</li> <li>• Observation of the core from various drill holes indicate that the rock is generally fairly solid even where it has been subjected to intense, pervasive hydrothermal alteration and core recoveries are generally 100%. Consequently, it is expected that the samples obtained were not unduly biased by significant core losses either during the drilling or cutting processes</li> </ul> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>• Core from GoldKing has been re-boxed prior to sampling where boxes have deteriorated, otherwise the original boxes have been retained. Core lengths have been measured and compared to the depth tags that are kept in the boxes from the drilling and recovered lengths have been recorded with the logging.</li> <li>• Where re-boxing of the core is required, core has been placed in the new boxes, row-by row with care taken to ensure all of the core has been transferred.</li> <li>• No relationship has been observed between core recovery and sample assay values.</li> </ul>												
<b>Logging</b>	<ul style="list-style-type: none"> <li>- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>- Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>- The total length and percentage of the relevant intersections logged.</li> </ul>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>• Geological logging was completed at 1-3 m intervals which is appropriate given the exploration was reconnaissance in nature.</li> <li>• All core was logged qualitatively at 1 to 3 m intervals depending on geology intercepted and core was photographed.</li> <li>• Inspections of core and logging have concluded that the logging was representative.</li> <li>• 100% of all core including all relevant intersections were logged</li> </ul> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>• Sorting, re-boxing and re-logging of available drill core is in progress. Core is being logged for lithology, alteration, mineralisation and structure. Where possible, logging is quantitative.</li> <li>• Progress of Colorado V logging and sampling is summarized below:</li> </ul> <table border="1"> <thead> <tr> <th>Hole_ID</th> <th>Depth (m)</th> <th>Logging Status</th> <th>Core Photograph</th> <th>Sampling Status</th> <th>Total Samples</th> </tr> </thead> <tbody> <tr> <td>ZK0-1</td> <td>413.6</td> <td>Complete</td> <td>Complete</td> <td>Samples Submitted</td> <td>281</td> </tr> </tbody> </table>	Hole_ID	Depth (m)	Logging Status	Core Photograph	Sampling Status	Total Samples	ZK0-1	413.6	Complete	Complete	Samples Submitted	281
Hole_ID	Depth (m)	Logging Status	Core Photograph	Sampling Status	Total Samples									
ZK0-1	413.6	Complete	Complete	Samples Submitted	281									

Criteria	JORC Code explanation	Commentary					
		ZK0-2	581.6	Complete	Complete	Samples Submitted	388
		ZK0-3	463.0	Complete	Complete	Not Re-sampled	
		ZK0-4	458.0	Complete	Complete	Samples Submitted	350
		ZK0-5	624.0	Complete	Pending	Samples Submitted	482
		ZK1-1	514.6	Complete	Pending	Samples Submitted	288
		ZK1-2	403.1	Complete	Complete	Not Re-Sampled	
		ZK1-3	425.0	Complete	Complete	Samples Submitted	279
		ZK1-4	379.5	Complete	Complete	Samples Submitted	267
		ZK1-5	419.5	Complete	Complete	Samples Submitted	266
		ZK1-6	607.5	Complete	Complete	Samples Submitted	406
		ZK1-7	453.18	Complete	Complete	Samples Submitted	370
		ZK1-8	556.0	Pending	Pending	Pending	
		ZK1-9	220.0	Complete	Complete	Samples Submitted	140
		ZK2-1	395.5	Complete	Complete	Samples Submitted	320
		ZK3-1	372.48	Complete	Complete	Samples Submitted	250
		ZK3-1A	295.52	Pending	Pending	Pending	
		ZK3-2	364.80	Pending	Complete	Not Re-sampled	
		ZK3-4	322.96	Complete	Complete	Samples Submitted	156
		ZK4-1	434.0	Pending	Pending	Pending	
		ZK4-2	390.5	Pending	Pending	Pending	
		ZK4-3	650.66	Pending	Pending	Pending	
		ZK4-4	285.0	Pending	Pending	Pending	
		ZK5-1	321.90	Complete	Complete	Not Re-sampled	
		ZK5-2	319.0	Pending	Pending	Pending	
		ZK5-3	446.5	Pending	Pending	Pending	
		ZK5-4	508.0	Pending	Pending	Pending	
		ZK5-5	532.0	Complete	Complete	Samples Submitted	378
		ZK6-1	552.6	Pending	Complete	Pending	
		ZK6-2	531	Pending	Pending	Pending	

**Challenger Exploration Limited**  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

**Issued Capital**  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

**Australian Registered Office**  
Level 1  
1205 Hay Street  
West Perth WA 6005

**Directors**  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

**Contact**  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

[www.challengerex.com](http://www.challengerex.com)

Criteria	JORC Code explanation	Commentary					
		ZK10-1	454.0	Complete	Complete	Samples Submitted	229
		ZK10-2	318.82	Pending	Pending	Pending	
		ZK10-3	331.52	Pending	Pending	Pending	
		ZK11-1	237.5	Pending	Pending	Pending	
		ZK12-1	531.5	Complete	Complete	Not Re-sampled	
		ZK12-2	510.6	Complete	Complete	Not Re-sampled	
		ZK13-1	394.0	Complete	Complete	Samples Submitted	246
		ZK13-2	194.0	Pending	Complete	Not Re-sampled	
		ZK13-3	197.06	Pending	Pending	Pending	
		ZK13-4	176.57	Pending	Pending	Pending	
		ZK13-5	184.7	Pending	Pending	Pending	
		ZK16-1	324.0	Complete	Complete	Pending	
		ZK16-2	385.83	Complete	Complete	Samples Submitted	223
		ZK18-1	410.5	Complete	Complete	Samples Submitted	286
		ZK19-1	548.60	Pending	Pending	Pending	
		ZK100-1	415.0	Pending	Pending	Pending	
		ZK103-1	524.21	Pending	Pending	Pending	
		ZK105-1	404.57	Pending	Pending	Pending	
		ZK205-1	347.0	Complete	Complete	Samples Submitted	211
		SAZK0-1A	569.1	Complete	Complete	Samples Submitted	396
		SAZK0-2A	407.5	Complete	Complete	Samples Submitted	260
		SAZK2-1	430.89	Complete	Complete	Samples Submitted	195
		SAZK2-2	354.47	Complete	Complete	Not Re-Sampled	
		CK2-1	121.64	Pending	Pending	Pending	
		CK2-2	171.85	Pending	Pending	Pending	
		CK2-3	116.4	Pending	Pending	Pending	
		CK2-4	146.12	Pending	Pending	Pending	
		CK2-5	357.56	Pending	Pending	Pending	
		CK2-6	392.56	Pending	Pending	Pending	

**Challenger Exploration Limited**  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

**Issued Capital**  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

**Australian Registered Office**  
Level 1  
1205 Hay Street  
West Perth WA 6005

**Directors**  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

**Contact**  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary																																																																						
		<table border="1"> <tr> <td>CK3-1</td> <td>185.09</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK3-2</td> <td>21.75</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK3-3</td> <td>138.02</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK5-1</td> <td>273.56</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK5-2</td> <td>273.11</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK13-1</td> <td>227.1</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK13-2</td> <td>231.16</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK13-3</td> <td>197.06</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK13-4</td> <td>176.57</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK13-5</td> <td>184.70</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>CK21-1</td> <td>143.47</td> <td>Pending</td> <td>Pending</td> <td>Pending</td> </tr> <tr> <td>Logged (m)</td> <td>14,282.01</td> <td>Logged</td> <td></td> <td>Samples Submitted 6,667</td> </tr> <tr> <td>Total (m)</td> <td>21,478.37</td> <td>Core Shack</td> <td></td> <td></td> </tr> <tr> <td>Total (m)</td> <td>25,264.83</td> <td>Drilled</td> <td></td> <td></td> </tr> </table>	CK3-1	185.09	Pending	Pending	Pending	CK3-2	21.75	Pending	Pending	Pending	CK3-3	138.02	Pending	Pending	Pending	CK5-1	273.56	Pending	Pending	Pending	CK5-2	273.11	Pending	Pending	Pending	CK13-1	227.1	Pending	Pending	Pending	CK13-2	231.16	Pending	Pending	Pending	CK13-3	197.06	Pending	Pending	Pending	CK13-4	176.57	Pending	Pending	Pending	CK13-5	184.70	Pending	Pending	Pending	CK21-1	143.47	Pending	Pending	Pending	Logged (m)	14,282.01	Logged		Samples Submitted 6,667	Total (m)	21,478.37	Core Shack			Total (m)	25,264.83	Drilled		
CK3-1	185.09	Pending	Pending	Pending																																																																				
CK3-2	21.75	Pending	Pending	Pending																																																																				
CK3-3	138.02	Pending	Pending	Pending																																																																				
CK5-1	273.56	Pending	Pending	Pending																																																																				
CK5-2	273.11	Pending	Pending	Pending																																																																				
CK13-1	227.1	Pending	Pending	Pending																																																																				
CK13-2	231.16	Pending	Pending	Pending																																																																				
CK13-3	197.06	Pending	Pending	Pending																																																																				
CK13-4	176.57	Pending	Pending	Pending																																																																				
CK13-5	184.70	Pending	Pending	Pending																																																																				
CK21-1	143.47	Pending	Pending	Pending																																																																				
Logged (m)	14,282.01	Logged		Samples Submitted 6,667																																																																				
Total (m)	21,478.37	Core Shack																																																																						
Total (m)	25,264.83	Drilled																																																																						
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>- If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>- If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>- For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>- Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>- Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>- Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>• Core was cut with diamond saw and half core was taken</li> <li>• All drilling was core drilling as such this is not relevant</li> <li>• Sample preparation was appropriate and of good quality. Each 1-3 m sample of half core was dried, crushed to a nominal – 10 mesh (ca 2mm), then 250 g of chips were split out and pulverized. A sub-sample of the pulp was then sent for analysis for gold by standard fire assay on a 30 g charge with an atomic absorption finish with a nominal 5 ppb Au detection limit.</li> <li>• Measures taken to ensure that the sampling is representative of the in-situ material collected is not outlined in the historical documentation however a program of re-assaying was undertaken by Odin which demonstrated the repeatability of original assay results</li> <li>• The use of a 1-3 m sample length is appropriate for deposits of finely disseminated mineralisation where long mineralised intersections are to be expected.</li> <li>• CEL ¼ core sampling was done by cutting the core with a diamond saw. Standards (CRM) and blanks were inserted into the batched sent for preparation and analysis. No duplicate samples were taken and ¼ core was retained for future reference. The sample size is appropriate for the style of mineralisation observed.</li> <li>• CEL rock chip samples of 2-3 kg are crushed to a nominal 2mm and a 500 g sub-sample is</li> </ul>																																																																						


Criteria	JORC Code explanation	Commentary
		<p>pulverized. The rock chips are collected from surface expose in creeks. Sampling is done so as to represent the material being mapped. The sample size is appropriate for the grain size of the material being sampled.</p> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>No information is available on the method/s that have been used to collect the soil samples.</li> <li>Selected intervals of drill core have been cut longitudinally using a diamond saw and ½ core has been sampled. Sample intervals range from 0.1m to 4.5m with an average length of 1.35m. The size of the samples is appropriate for the mineralisation observed in the core.</li> <li>Re-sampling of the core involves cutting of ¼ core (where previously sampled) or ½ core where not previously sampled. ¼ or ½ core over intervals of 1-3 metres provides an adequate sample size for the material being sampled.</li> </ul>
<p><b>Quality of assay data and laboratory tests</b></p>	<ul style="list-style-type: none"> <li><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></li> <li><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></li> <li><i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></li> </ul>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used by Newmont and Odin are still in line with industry best practice with appropriate QA/QC and chain of custody and are considered appropriate.</li> <li>Available historical data does not mention details of geophysical tools as such it is believed a geophysical campaign was not completed in parallel with the drilling campaign.</li> <li>Duplicates were prepared by the Laboratory (Bonder Cleg) which used internal standards. Newmont also inserted its own standards at 25 sample intervals as a control on analytical quality. Later Odin undertook a re-assaying program of the majority of the higher-grade sections which confirmed the repeatability.</li> <li>Given the above, it is considered acceptable levels of accuracy and precision have been established</li> <li>CEL ¼ and ½ core samples were prepared for assay at SGS Del Ecuador S.A.in Quito, Ecuador with analysis completed by in Lima at SGS del in Peru S.A.C and by ALS Laboratories in Quito with analysis completed by ALS in Vancouver, Canada. Samples were crushed and a 500g sub-sample was pulverized to 85% passing 75 µm. The technique provides for a near total analysis of the economic elements of interest.</li> <li>CEL rock chip samples were prepared for assay at ALS Laboratories (Quito) with analysis being completed at ALS Laboratories (Peru). The fire assay and 4-acid digest provide for near-total analysis of the economic elements of interest. No standards or blanks were submitted with the rock chip samples.</li> </ul> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>No information is available on the methods used to analyse the soil or drill core samples. Assay results are not provided in this report.</li> </ul> <p>Soil samples have been analysed by GK for Au, Cu, Ag, Zn, Pb, As, Mn, Ni, Cr, Mo, Sn, V, Ti, Co, B,</p>

Ba, Sb, Bi and Hg. Pulps have been securely retained and check assaying is planned.


- Drill core was partially assayed for gold only with assays undertaken by Goldking's on site laboratory
- CEL samples of drill core re-sampled by CEL blanks and CRM (standards) added to the batches to check sample preparation and analysis.

3 separate CRM's were included in the batches sent for analysis. All three have certified Au values. The results of the analysis of the CRM is shown below. With a few exceptions, the CRM has returned results within +/- 2 SD of the certified reference value. There is no bias in the results returned from either SGS or ALS laboratories.

CRM3 analyses by fire assay at SGS did not include overlimit (>10 g/t).

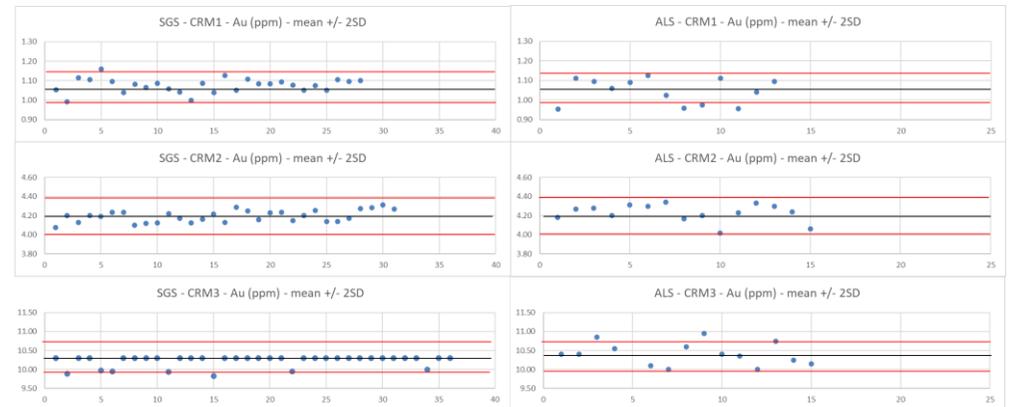

- No duplicate samples have been submitted.
- Two different blanks have been included randomly within the sample batches. A CRM blank with a value of <0.01 ppm (10 ppb) Au was used initially. More recent batches have used a blank gravel material which has no certified reference value. The results are shown below. The first 4 gravel blanks show elevated Au values which is believed to be due to contamination of the blank prior to submission and not due to laboratory contamination. With one exception, the blanks have returned values below 10 ppb.

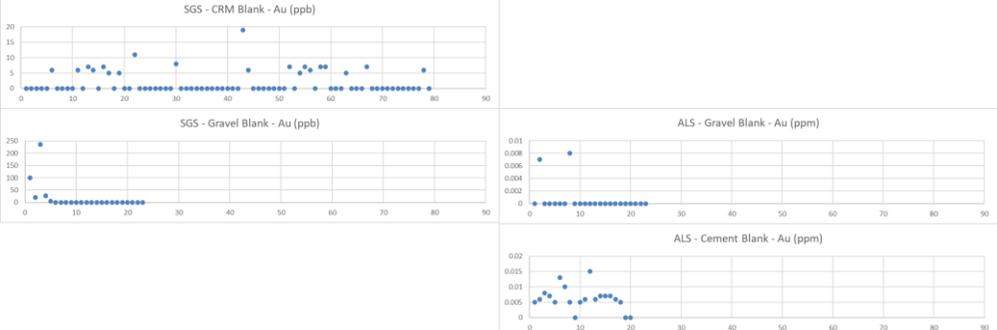Criteria	JORC Code explanation	Commentary
		
<p><b>Verification of sampling and assaying</b></p>	<ul style="list-style-type: none"> <li>- The verification of significant intersections by either independent or alternative company personnel.</li> <li>- The use of twinned holes.</li> <li>- Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>- Discuss any adjustment to assay data.</li> </ul>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>• All intersections with results greater than 0.5 g/t were re-assayed using the “blaster” technique - a screen type fire analysis based on a pulverised sample with a mass of about 5 kg. Additionally, Odin re-assayed the many of the higher-grade sections with re-assay results demonstrating repeatability of the original results.</li> <li>• Neither Newmont nor Odin attempted to verify intercepts with twinned holes</li> <li>• Data was sourced from scanned copies of original drill logs and in some cases original paper copies of assay sheets are available. This data is currently stored in a drop box data base with the originals held on site.</li> <li>• No adjustments to assay data were made.</li> <li>• CEL assay data has not been independently verified or audited. Data is stored electronically in MS Excel and PDF format from the Laboratory and entered into a Project database for analysis. There has been no adjustment of the data.</li> </ul> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>• There is no information available on the verification of sample and assay results. No assay data is provided in this report. Soil replicate samples and second split assay results have been provided but not fully analysed at this stage.</li> <li>• Of the 4,495 soil samples in the GK database, 166 are replicate samples and 140 are second split re-analyses. 37 samples have no co-ordinates in the database. The remaining 4,152 have analyses for all 19 elements indicated above.</li> <li>• Significant intersections have been internally checked against the assay data received. The data received has been archived electronically and a database of all drill information is being developed. There is no adjustment of the assay data.</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>- Specification of the grid system used.</li> <li>- Quality and adequacy of topographic control.</li> </ul>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>• Newmont undertook survey to located drill holes in accordance with best practice at the time. No formal check surveying has been undertaken to verify drill collar locations at this stage</li> <li>• Coordinate System: PSAD 1956 UTM Zone 17S Projection: Transverse Mercator Datum: Provisional S American 1956</li> <li>• Quality of topographic control appears to be+ - 1 meter which is sufficient for the exploration activities undertaken.</li> <li>• Rock chip samples have been located using topographic maps with the assistance of hand-held GPS.</li> </ul> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>• Coordinate System: PSAD 1956 UTM Zone 17S Projection: Transverse Mercator Datum: Provisional S American 1956</li> <li>• No information is available on the collar and down-hole survey techniques used on the Colorado V concession.</li> <li>• Rock chip sample locations are determined by using a hand held GPS unit which is appropriate for the scale of the mapping program being undertaken.</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>- Data spacing for reporting of Exploration Results.</li> <li>- Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>- Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>• Drilling on both concessions is exploration based and a grid was not considered appropriate at that time.</li> <li>• A JORC compliant Mineral Resource has not been estimated</li> <li>• Sample compositing was not used</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>- If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul style="list-style-type: none"> <li>• A sampling bias is not evident.</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>- The measures taken to ensure sample security.</li> </ul>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>• Newmont sent all its field samples to the Bondar Clegg sample preparation facility in Quito for preparation. From there, approximately 100 grams of pulp for each sample was air freighted to the Bondar Clegg laboratory (now absorbed by ALS-Chemex) in Vancouver, for analysis. There is no record of any special steps to monitor the security of the samples during transport either between the field and Quito, or between Quito and Vancouver. However, Newmont did insert its own standards at 25 sample intervals as a control on analytical quality.</li> <li>• CEL samples are kept in a secure location and prepared samples are transported with appropriate paperwork, securely by registered couriers. Details of the sample security and</li> </ul>

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
		<p>chain of custody are kept at the Project office for future audits.</p> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>GK analysed samples in an on-site laboratory. It is understood that the samples have remained on site at all times.</li> <li>CEL have collected samples at the core shed at El Guayabo and secured the samples in polyweave sacks for transport by courier to SGS Laboratories in Quito for preparation. SGS in Quito courier the prepared sample pulps to SGS in Peru for analysis. Photographs and documentation are retained to demonstrate the chain of custody of the samples at all stages.</li> </ul>
<b>Audits or reviews</b>	- <i>The results of any audits or reviews of sampling techniques and data.</i>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>The sampling techniques were reviewed as part of a 43-101 Technical report on Cangrejos Property which also included the early results of the El Joven joint venture between Odin and Newmont, under which the work on the El Guayabo project was undertaken. This report is dated 27 May 2004 and found the sampling techniques and intervals to be appropriate with adequate QA/QC and custody procedures, core recoveries generally 100%, and appropriate duplicates and blanks use for determining assay precision and accuracy.</li> <li>There have been no audits or reviews of CEL data for the El Guayabo.</li> </ul> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>No audits or reviews of sampling techniques and data is known. Goldking did twin two earlier holes with results still being compiled.</li> </ul>

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></li> <li><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></li> </ul>	<ul style="list-style-type: none"> <li>The El Guayabo (Code. 225) mining concession is located within El Oro Province. The concession is held by Torata Mining Resources S.A (TMR S.A) and was granted in compliance with the Mining Act ("MA") in on April 27, 2010. There are no overriding royalties on the project other than normal Ecuadorian government royalties.</li> <li>The property has no historical sites, wilderness or national park issues.</li> <li>The mining title grants the owner an exclusive right to perform mining activities, including, exploration, exploitation and processing of minerals over the area covered by the prior title for a period of 25 years, renewable for a further 25 years. Under its option agreement, the owner has been granted a negative pledge (which is broadly equivalent to a fixed and floating charge) over the concession. In addition, a duly notarized Irrevocable Promise to Transfer executed by TMR S.A in favor of AEP has been lodged with the Ecuador Mines Department.</li> <li>The Colorado V mining concession (Code No. 3363.1) located in Bellamaria, Santa Rosa, El Oro, Ecuador was granted in compliance with the Mining Act ("MA") in on July 17, 2001. It is adjacent to El Guayabo concession to the north. The</li> </ul>

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

**Issued Capital**  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

**Australian Registered Office**  
Level 1  
1205 Hay Street  
West Perth WA 6005

**Directors**  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

**Contact**  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
		<p>concession is held by Goldking Mining Company S.A. There are no overriding royalties on the project other than normal Ecuadorian government royalties.</p> <ul style="list-style-type: none"> <li>- The concession has no historical sites, wilderness or national park issues.</li> <li>- The El Guayabo 2 Guayabo (Code. 300964) mining concession is located Torata parish, Santa Rosa canton, El Oro province, Ecuador. The concession is held by T Mr. Segundo Ángel Marín Gómez and Mrs. Hermida Adelina Freire Jaramillo and was granted in compliance with the Mining Act (“MA”) on 29 April 29, 2010. There are no overriding royalties on the project other than normal Ecuadorian government royalties.</li> <li>- The property has no historical sites, wilderness, or national park issues.</li> </ul>
<b>Exploration done by other parties</b>	- <i>Acknowledgment and appraisal of exploration by other parties.</i>	<p><b>El Guayabo:</b></p> <ul style="list-style-type: none"> <li>- Previous exploration on the project has been undertaken by Newmont and Odin from 1994 to 1997. This included surface pit and rock chip geochemistry, followed by the drilling of 33 drill holes for a total of 7605.52 meters) to evaluate the larger geochemical anomalies.</li> <li>- The collection of all exploration data by Newmont and Odin was of a high standard and had appropriate sampling techniques and intervals, adequate QA/QC and custody procedures, and appropriate duplicates and blanks used for determining assay precision and accuracy.</li> <li>- The geological interpretation of this data, including core logging and follow up geology was designed and directed by in-country inexperienced geologists. It appears to have been focused almost exclusively for gold targeting surface gold anomalies or the depth extensions of higher-grade gold zones being exploited by the artisanal miners. The geologic logs for all drill holes did not record details that would have been typical, industry standards for porphyry copper exploration at that time. Several holes which ended in economic mineralisation have never been followed up.</li> <li>- In short, important details which would have allowed the type of target to be better explored were missed which in turn presents an opportunity to the current owner.</li> </ul> <p><b>Colorado V:</b></p> <ul style="list-style-type: none"> <li>- All exploration known has been completed by GK. Drilling has been done from 2016 to 2019. 56 drill holes, totaling 21,471.83m have been completed by GK.</li> </ul> <p><b>El Guayabo 2:</b></p> <ul style="list-style-type: none"> <li>- Exploration work undertaken by the previous owner was limited to field mapping and sampling including assaying of a small number of samples for gold, silver, copper, lead and zinc. The report is only available in Spanish and assays were conducted in a local laboratory in Ecuador with the majority of this work undertaken in 2017.</li> </ul>
<b>Geology</b>	- <i>Deposit type, geological setting and style of mineralisation.</i>	<ul style="list-style-type: none"> <li>- It is believed that the El Guayabo, El Guayabo 2, and Colorado V concessions contain a “Low Sulfide” porphyry gold copper system and intrusive-related gold. The host rocks for the intrusive complex is metamorphic basement and Oligocene – Mid-Miocene volcanic rocks. This suggests the intrusions are of a similar age to the host volcanic sequence, which also suggests an evolving basement magmatic system. Intrusions are described in the core logs as quartz diorite and dacite. Mineralisation has been recognized in: <ul style="list-style-type: none"> <li>– Steeply plunging breccia bodies and in the metamorphic host rock adjacent to the breccia (up to 200 m in diameter)</li> <li>– Quartz veins and veinlets</li> </ul> </li> </ul>

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
----------	-----------------------	------------

– Disseminated pyrite and pyrrhotite in the intrusions and in the metamorphic host rock near the intrusions.

**Drill hole Information**

- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:
  - o easting and northing of the drill hole collar
  - o elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar
  - o dip and azimuth of the hole
  - o down hole length and interception depth
  - o hole length.
- If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.

El Guayabo drill hole information is provided below.

DRILLHOLE CODE	EAST (X)	NORTH (N)	ELEVATION (m.a.s.l)	AZIMUTH (°)	DIP (°)	FINAL DEPTH	DRILLED BY
DDHGY 01	628928.09	9605517.20	839.01	360	-90.0	249.20	Odin
DDHGY 02	629171.15	9606025.55	983.16	360.0	-90.0	272.90	Odin
DDHGY 03	629041.84	9606312.81	1063.37	305.0	-60.0	295.94	Odin
DDHGY 04	629171.68	9606025.18	983.2	125.0	-60.0	172.21	Odin
DDHGY 05	628509.21	9606405.29	989.87	145.0	-60.0	258.27	Odin
DDHGY 06	629170.56	9606025.97	983.11	305.0	-60.0	101.94	Odin
DDHGY 07	629170.81	9606025.80	983.16	305.0	-75.0	127.00	Odin
DDHGY 08	628508.95	9606405.74	989.86	145.0	-75.0	312.32	Odin
DDHGY 09	629171.22	9606025.88	983.22	45.0	-75.0	166.25	Odin
DDHGY 10	629170.77	9606025.24	983.12	225.0	-75.0	194.47	Odin
DDHGY 11	628507.97	9606405.33	989.83	160.0	-60.0	241.57	Odin
DDHGY 12	629087.18	9606035.53	996.98	125.0	-60.0	255.7	Odin
DDHGY 13	629242.46	9605975.42	997.292	320.0	-65.0	340.86	Odin
DDHGY 14	629242.27	9605975.64	997.285	320.0	-75.0	309.14	Odin
DDHGY 15	629194.67	9605912.35	977.001	320.0	-60.0	251.07	Odin
DDHGY 16	629285.92	9606044.44	1036.920	320.0	-60.0	195.73	Odin
DDHGY 17	629122.31	9606058.64	1021.053	125.0	-82.0	280.04	Odin
DDHGY 18	628993.10	9606035.45	977.215	140.0	-60.0	160.35	Odin
DDHGY 19	629087.23	9606034.98	997.332	45.0	-53.0	175.41	Odin

Criteria	JORC Code explanation	Commentary
----------	-----------------------	------------

DRILLHOLE CODE	EAST (X)	NORTH (N)	ELEVATION (m.a.s.l)	AZIMUTH (°)	DIP (°)	FINAL DEPTH	DRILLED BY
JDH01	627185.78	9606463.27	933.47	280.0	-60.0	236.89	Newmont
JDH02	627260.37	9606353.12	921.56	280.0	-45.0	257.62	Newmont
JDH03	627191.61	9606200.35	952.82	280.0	-45.0	260.97	Newmont
JDH04	627429.81	9606324.00	933.80	280.0	-45.0	219.00	Newmont
JDH05	627755.97	9606248.70	1066.24	280.0	-45.0	210.37	Newmont
JDH06	628356.37	9606416.13	911.58	150.0	-45.0	302.74	Newmont
JDH07	628356.37	9606416.13	911.58	150.0	-75.0	105.79	Newmont
JDH08	628356.37	9606416.13	911.58	150.0	-60.0	352.74	Newmont
JDH09	628507.01	9606408.43	990.18	150.0	-45.0	256.70	Newmont
JDH10	628897.96	9606813.62	985.60	270.0	-45.0	221.64	Newmont
JDH11	628878.64	9606674.39	1081.96	270.0	-45.0	217.99	Newmont
JDH12	629684.61	9606765.31	993.45	150.0	-60.0	124.08	Newmont
JDH13	629122.61	9606058.49	1020.98	125.0	-60.0	239.33	Newmont
JDH14	628897.15	9605562.77	852.59	90.0	-45.0	239.32	Newmont

Colorado V drill hole information:

hole ID	East (m)	North (m)	Elevation	Azimuth (°)	Dip (°)	final depth	Driller
ZK0-1	626378.705	9608992.99	204.452	221	-60	413.60	Shandong Zhaojin
ZK0-2	626378.705	9608992.99	204.452	221	-82	581.60	Shandong Zhaojin
ZK0-3	626475.236	9609095.444	197.421	221	-75	463.00	Shandong Zhaojin
ZK0-4	626476.119	9609098.075	197.225	221	-90	458.00	Shandong Zhaojin
ZK0-5	626475.372	9609100.909	197.17	300	-70	624.00	Shandong Zhaojin
ZK1-1	626310.629	9608865.923	226.385	61	-70	514.60	Shandong Zhaojin
ZK1-2	626313.901	9608867.727	226.494	150	-70	403.10	Shandong Zhaojin
ZK1-3	626382.401	9608894.404	229.272	61	-70	425.00	Shandong Zhaojin
ZK1-4	626502.206	9608982.539	227.333	61	-70	379.50	Shandong Zhaojin
ZK1-5	626497.992	9608979.449	227.241	241	-70	419.50	Shandong Zhaojin
ZK1-6	626500.813	9608979.367	227.315	180	-70	607.50	Shandong Zhaojin
ZK1-7	626498.548	9608979.541	227.28	241	-82	453.18	Shandong Zhaojin
ZK1-8	626501.094	9608980.929	227.208	61	-85	556.00	Shandong Zhaojin
ZK1-9	626416.4	9609040.6	202.416	203	-23	220.00	Lee Mining
ZK2-1	626329.859	9609005.863	213.226	221	-90	395.50	Shandong Zhaojin
ZK3-1	628295.833	9608947.769	309.987	279	-38	372.48	
ZK3-1-A	626416.4	9609040.6	202.416	179	-29	295.52	Lee Mining

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary						
	ZK3-2	628295.833	9608947.769	309.987	205	-30	364.80	
	ZK3-4	628295.833	9608947.769	309.987	170	-30	322.96	
	ZK4-1	626281.066	9609038.75	224.176	221	-90	434.00	Shandong Zhaojin
	ZK4-2	626281.066	9609038.75	224.176	221	-70	390.50	Shandong Zhaojin
	ZK4-3	626386.498	9609186.951	225.517	221	-70	650.66	Shandong Zhaojin
	ZK4-4	626287.7817	9609031.298	215	215	-05	285.00	
	ZK5-1	626377.846	9608790.388	273.43	221	-78	321.90	Shandong Zhaojin
	ZK5-2	626377.539	9608793.769	273.542	41	-78	319.00	Shandong Zhaojin
	ZK5-3	626383.556	9608800.999	273.622	330	-70	446.50	Shandong Zhaojin
	ZK5-4	626383.556	9608800.999	273.622	330	-78	508.00	Shandong Zhaojin
	ZK5-5	626432.795	9608847.735	242.572	61	-70	532.00	Shandong Zhaojin
	ZK6-1	626230.28	9609020.202	260.652	221	-70	552.60	Shandong Zhaojin
	ZK6-2	626165.623	9608991.594	271.928	221	-70	531.00	Shandong Zhaojin
	ZK10-1	626700.8538	9609675.002	126.617	221	-53	454.00	Lee Mining
	ZK10-2	626744.7	9609711	110.817	310	-30	318.82	
	ZK10-3	626744.7	9609711	110.817	310	-60	331.52	
	ZK11-1	626446.263	9608705.238	290.028	221	-78	237.50	Shandong Zhaojin
	ZK12-1	626088.326	9609034.197	314.552	221	-70	531.50	Shandong Zhaojin
	ZK12-2	626019.538	9608961.409	294.649	221	-70	510.60	Shandong Zhaojin
	ZK13-1	627763.877	9609906.484	197.899	180	-70	394.00	Shandong Zhaojin
	ZK13-2	627757.925	9609713.788	234.34	0	-70	194.00	Shandong Zhaojin
	ZK13-3	TBA	TBA	TBA	TBA	TBA	197.06	
	ZK13-4	TBA	TBA	TBA	TBA	TBA	176.57	
	ZK13-5	TBA	TBA	TBA	TBA	TBA	184.70	
	ZK16-1	626432.95	9609539.705	207.288	153	-45	330.00	
	ZK16-2	626432.95	9609539.705	207.288	183	-45	394.00	
	ZK18-1	627123.327	9609846.268	142.465	180	-70	410.50	Shandong Zhaojin
	ZK19-1	626753.271	9608802.634	386.627	221	-70	548.60	Shandong Zhaojin
	ZK100-1	626170.882	9608923.778	251.177	131	-70	415.00	Shandong Zhaojin
	ZK103-1	628203.1453	9607944.85	535.324	215	-53	524.21	Lee Mining
	ZK105-1	628172.5923	9607826.055	541.244	183	-54	404.57	Lee Mining
	ZK205-1	626257.123	9608795.904	243.297	160	-70	347.00	Shandong Zhaojin
	SAZK0-1A	627477.062	9609865.618	217.992	180	-70	569.10	Shandong Zhaojin
	SAZK0-2A	627468.807	9609805.054	213.63	180	-70	407.50	Shandong Zhaojin
	SAZK2-1	627330.0126	9609556.466	201.145	76	-05	430.89	Lee Mining
	SAZK2-2	627330.0126	9609556.466	201.145	62	-05	354.47	Lee Mining
	CK2-1	626328.573	9609000.856	216.798	221	-45	121.64	Shandong Zhaojin
	CK2-2	626328.573	9609000.856	216.798	251	-45	171.85	Shandong Zhaojin

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
		CK2-3 626328.573 9609000.856 216.798 191 -45 116.40 Shandong Zhaojin
		CK2-4 626328.573 9609000.856 216.798 221 -70 146.12 Shandong Zhaojin
		CK2-5 626254.4315 9608931.693 190.593 342 -05 357.56 Lee Mining
		CK2-6 626298.1066 9608961.819 203.231 332 -18 392.56 Lee Mining
		CK3-1 626359.641 9608859.373 205.96 20 -15 185.09 Shandong Zhaojin
		CK3-2 626359.641 9608859.373 205.96 163 00 21.75 Shandong Zhaojin
		CK3-3 626359.641 9608859.373 205.96 50 -15 138.02 Shandong Zhaojin
		CK5-1 626460.1233 9608906.592 202.124 194 -74 273.56 Lee Mining
		CK5-2 626457.0999 96089.8.4999 202.126 251 -69 273.11 Lee Mining
		CK13-1 626610.0642 9608838.445 202.556 41 -05 227.10 Lee Mining
		CK13-2 626610.0642 9608838.445 202.556 41 -40 231.16 Lee Mining
		CK13-3 626605.2307 9608833.471 202.556 221 -59 197.06 Lee Mining
		CK13-4 626604.0848 9608836.544 203.013 209 -45 176.57
		CK13-5 626607.5245 9608832.296 203.013 136 -45 184.70
		CK21-1 626693.536 9608691.062 204.927 41 00 143.47
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>- Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>- The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<p>No grade cutting has been used to derive the weighted average grades reported.</p> <ul style="list-style-type: none"> <li>• Minimum cut of grade of 0.2 g/t Au Equivalent (AuEq) was used for determining intercepts.</li> <li>- Aggregate intercepts have been reported with higher grade inclusions to demonstrate the impact of aggregation. A bottom cut of 0.5 g/t Au Equivalent has been used to determine the higher-grade inclusions. Given the generally consistent nature of the mineralisation the impact of the aggregation of high-grade results and longer lengths of low-grade results does not have a large impact. For example, in the intercept of 156m @ 2.6 g.t Au in hole GGY-02: <ul style="list-style-type: none"> <li>– over half of the intercept comprises gold grades in excess of 1 g/t Au</li> <li>– only 20% of the intercept includes grades between 0.2 and 0.5 g/t Au</li> <li>– over one third includes gold grades in excess of 2 g/t Au.</li> </ul> </li> <li>• Au Eq assumes a gold price of USD 1,275/oz, a silver price of USD 16.43 /oz and a copper price of USD 6,766 /t.</li> <li>• Metallurgical recovery factors for gold, silver and copper are assumed to be equal. No metallurgical factors have been applied in calculating the Au Eq, hence the formula for calculating the Au Eq is <math>Au (g/t) + (Ag (g/t) \times 16.43/1275) + (1.650373 \times Cu (\%))</math>.</li> <li>• CEL confirms that it is the company's opinion that all the elements included in the metal equivalents calculation have a reasonable potential to be recovered and sold.</li> </ul>

Drillhole (#)		Mineralised Inte		Total (m)	Gold (g/t)	Ag (g/t)	Cu (%)	Au Equiv (g/t)	Azimuth (deg)	Incl (deg)	TD (m)
		From	To								
JDH-001	from	183	190.6	7.6 m @	0.3 g/t Au +		not assayed	n/a	280	-60	236.9
JDH-002	from	7.6	152.9	145.3 m @	0.4 g/t Au +		not assayed	n/a	280	-45	257.5
	and	199	243	44.0 m @	0.4 g/t Au +		not assayed	n/a			
JDH-003	from	35.95	71.6	35.7 m @	0.5 g/t Au +		not assayed	n/a	280	-45	261
	and	120.4	254.6	134.2 m @	0.4 g/t Au +		not assayed	n/a			
	inc	146.81	224.08	77.3 m @	0.5 g/t Au +		not assayed	n/a			
JDH-004	from	3.96	21.95	18.0 m @	0.4 g/t Au +		not assayed	n/a	280	-45	219
	and	79.74	120.42	40.7 m @	0.4 g/t Au +		not assayed	n/a			
	and	150.9	203.7	52.8 m @	0.7 g/t Au +		not assayed	n/a			
JDH-005	from	5.2	81.4	76.2 m @	0.4 g/t Au +		not assayed	n/a	280	-45	210.4
	and	169.7	208.5	38.8 m @	0.2 g/t Au +		not assayed	n/a			
JDH-006	from	17.99	89.6	71.6 m @	0.2 g/t Au +	2.0 g/t Ag +	0.10 % Cu	0.42	150	-45	302.7
	and	164.8	281	116.2 m @	0.6 g/t Au +	8.9 g/t Ag +	0.40 % Cu	1.37			
	inc	227.8	281.09	53.3 m @	1.2 g/t Au +	13.2 g/t Ag +	0.62 % Cu	2.39			
JDH-007	from	39.7	84.45	44.8 m @	0.3 g/t Au +	1.4 g/t Ag +	0.04 % Cu	0.38	150	-75	105.8
JDH-008	from	104.7	136.7	32.0 m @	0.1 g/t Au +	3.6 g/t Ag +	0.13 % Cu	0.41	150	-60	352.7
	and	249.08	316.15	67.1 m @	0.2 g/t Au +	5.7 g/t Ag +	0.21 % Cu	0.62			
	and	291.76	316.15	24.4 m @	0.5 g/t Au +	9.2 g/t Ag +	0.34 % Cu	1.13			
JDH-009	from	10.3	122.03	111.7 m @	0.7 g/t Au +	14.6 g/t Ag +	0.58 % Cu	1.85	150	-45	256.7
	inc	34.6	91.54	56.9 m @	0.2 g/t Au +	19.1 g/t Ag +	0.82 % Cu	1.80			
	and	201.4	205.4	4.0 m @	11.4 g/t Au +	9.7 g/t Ag +	0.01 % Cu	11.54			
	and	255.1	eoh	1.5 m @	0.7 g/t Au +	1.5 g/t Ag +	0.02 % Cu	0.75			
JDH-10	from	1.5	50.9	49.4 m @	0.5 g/t Au +	2.5 g/t Ag +	0.09 % Cu	0.68	270	-45	221.6
	and	90.54	119	28.5 m @	0.2 g/t Au +	3.0 g/t Ag +	0.10 % Cu	0.40			
	and	140	203	81.6 m @	0.4 g/t Au +	1.3 g/t Ag +	0.07 % Cu	0.53			
JDH-011	from	100.7	218	117.3 m @	0.4 g/t Au +	4.6 g/t Ag +	0.10 % Cu	0.62	270	-45	218.0
JDH-012	from	12.2	53.96	41.8 m @	0.6 g/t Au +	6.5 g/t Ag +	0.02 % Cu	0.67	150	-60	124.1
JDH-013	from	53.35	69.6	16.3 m @	0.5 g/t Au +	1.2 g/t Ag +	0.01 % Cu	0.48	150	-60	239.3
	and	89.9	154.9	65.0 m @	1.4 g/t Au +	2.8 g/t Ag +	0.06 % Cu	1.53			
	inc	114.32	142.76	28.4 m @	2.8 g/t Au +	4.9 g/t Ag +	0.10 % Cu	3.03			
JDH-014	from	26.96	75.69	48.7 m @	0.4 g/t Au +	5.2 g/t Ag +	0.10 % Cu	0.63	90	-60	239.4
	and	85.84	116.32	30.5 m @	0.2 g/t Au +	4.2 g/t Ag +	0.1 % Cu	0.42			
	and	128.52	175.3	46.8 m @	0.5 g/t Au +	3.3 g/t Ag +	0.08 % Cu	0.63			
	and	179.35	217.98	38.6 m @	0.1 g/t Au +	2.5 g/t Ag +	0.08 % Cu	0.26			

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Drillhole (#)	Mineralised Inte From	Total To (m)	Gold (g/t)	Ag (g/t)	Cu (%)	Au Equiv (g/t)	Azimuth (deg)	Incl (deg)	TD (m)
GGY-001	from	10 69	59.0 m @ 0.2 g/t Au + 2.8 g/t Ag + 0.07 % Cu			0.35	360	-90	249.2
	and	139 249.2	110.2 m @ 0.4 g/t Au + 1.1 g/t Ag + 0.06 % Cu			0.51			
	inc	141 174	33.0 m @ 0.6 g/t Au + 2.0 g/t Ag + 0.08 % Cu			0.76			
GGY-002	from	9.7 166	156.3 m @ 2.6 g/t Au + 9.7 g/t Ag + 0.16 % Cu			2.99	360	-90	272.9
	inc	27 102	75.0 m @ 4.6 g/t Au + 19.1 g/t Ag + 0.22 % Cu			5.21			
	and	114 166	52.0 m @ 1.3 g/t Au + 3.3 g/t Ag + 0.18 % Cu			1.64			
	plus	244 272.9	28.9 m @ 0.3 g/t Au + 2.4 g/t Ag + 0.04 % Cu			0.37			
GGY-003	from	40 260.75	220.8 m @ 0.2 g/t Au + 2.9 g/t Ag + 0.06 % Cu			0.36	305	-60	295.9
GGY-004	from	1 42	41.0 m @ 0.5 g/t Au + 2.3 g/t Ag + 0.03 % Cu			0.56	125	-60	172.2
GGY-005	from	12 162	150.0 m @ 0.4 g/t Au + 11.0 g/t Ag + 0.30 % Cu			0.99	145	-60	258.3
	inc	14 54	40.0 m @ 0.6 g/t Au + 25.5 g/t Ag + 0.60 % Cu			1.95			
	and	180 194	14.0 m @ 0.2 g/t Au + 6.1 g/t Ag + 0.22 % Cu			0.64			
GGY-006	from	72 101.9	49.0 m @ 0.4 g/t Au + 2.3 g/t Ag + 0.03 % Cu			0.45	305	-60	101.9
GGY-007	from	0.9 41	40.1 m @ 1.1 g/t Au + 2.6 g/t Ag + 0.04 % Cu			1.20	305	-75	127
	inc	110 127	17.0 m @ 0.9 g/t Au + 1.2 g/t Ag + 0.04 % Cu			0.98			
GGY-008	from	16 271	255.0 m @ 0.1 g/t Au + 6.5 g/t Ag + 0.24 % Cu			0.62	145	-75	312.3
	inc	235 271	36.0 m @ 0.4 g/t Au + 11.5 g/t Ag + 0.50 % Cu			1.32			
GGY-009	from	1.65 45	43.4 m @ 1.7 g/t Au + 3.0 g/t Ag + 0.06 % Cu			1.80	45	-75	166.2
GGY-010	from	0 69	69.0 m @ 1.6 g/t Au + 2.3 g/t Ag + 0.03 % Cu			1.67	225	-75	194.5
	inc	21 50	29.0 m @ 2.9 g/t Au + 2.7 g/t Ag + 0.03 % Cu			2.98			
	and	75 95	20.0 m @ 0.3 g/t Au + 0.8 g/t Ag + 0.01 % Cu			0.33			
GGY-011	from	14 229	215.0 m @ 0.2 g/t Au + 9.6 g/t Ag + 0.36 % Cu			0.89	160	-60	241.6
	inc	14 97	83.0 m @ 0.2 g/t Au + 14.9 g/t Ag + 0.50 % Cu			1.24			
	inc	202 229	27.0 m @ 0.4 g/t Au + 15.2 g/t Ag + 0.80 % Cu			1.90			
GGY-012	from	57 192	135.0 m @ 0.3 g/t Au + 2.0 g/t Ag + 0.06 % Cu			0.39	125	-60	256
	and	156 192	36.0 m @ 0.2 g/t Au + 3.3 g/t Ag + 0.13 % Cu			0.44			
GGY-013	from	229.7 280	50.3 m @ 0.2 g/t Au + 2.2 g/t Ag + 0.05 % Cu			0.31	320	-65	340.9
GGY-014			nsi			0.00	320	-75	309.1
GGY-015	from	110 132.4	22.4 m @ 0.4 g/t Au + 0.5 g/t Ag + 0.03 % Cu			0.41	320	-60	251.1
	and	157 225.5	68.5 m @ 0.3 g/t Au + 1.5 g/t Ag + 0.10 % Cu			0.45			
GGY-016	from	8 30	22.0 m @ 0.2 g/t Au + 0.7 g/t Ag + 0.01 % Cu			0.26	320	-60	195.7
	and	42 57	15.0 m @ 0.3 g/t Au + 0.5 g/t Ag + 0.02 % Cu			0.34			
	and	105 118	13.0 m @ 0.2 g/t Au + 0.7 g/t Ag + 0.01 % Cu			0.26			
	and	185 188	3.0 m @ 1.0 g/t Au + 0.8 g/t Ag + 0.02 % Cu			1.04			
GGY-017	from	0 24	24.0 m @ 0.5 g/t Au + 1.3 g/t Ag + 0.01 % Cu			0.49	125	-82	280.4
	and	69 184	115.0 m @ 0.5 g/t Au + 2.1 g/t Ag + 0.03 % Cu			0.53			
	inc	125 147	22.0 m @ 0.2 g/t Au + 2.0 g/t Ag + 0.05 % Cu			0.29			
	and	206 241	35.0 m @ 0.3 g/t Au + 1.7 g/t Ag + 0.05 % Cu			0.41			
	and	254 277	23.0 m @ 0.6 g/t Au + 1.2 g/t Ag + 0.04 % Cu			0.63			
GGY-018	from	81 136	55.0 m @ 0.2 g/t Au + 3.5 g/t Ag + 0.06 % Cu			0.34	140	-60	160.4
GGY-019	from	89 155	66.0 m @ 0.3 g/t Au + 2.0 g/t Ag + 0.03 % Cu			0.36	45	-53	175.4

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

[www.challengerex.com](http://www.challengerex.com)

Criteria	JORC Code explanation	Commentary						
Comparison showing historic and re-assayed intercepts for El Guayabo drill holes are shown below:								
Drill hole (#)		From	To	Total (m)	Au (g/t)	Ag (g/t)	Cu (%)	Au Eq (g/t)
GGY-001	historical intercept	139	249.2	110.2m	0.4	1.1	0.06	0.5
	(re-assayed section)	141	177	36.0m	0.54	2.30	0.08	0.7
	(original assays)	'	'	36.0m	0.56	1.51	0.08	0.7
	(re-assayed section)	205	236	31.0m	0.19	0.89	0.03	0.3
	(original assays)	'	'	31.0m	0.21	0.13	0.03	0.3
GGY-002	historical intercept	9.7	166	156.3m	2.6	9.7	0.16	3.0
	(re-assayed section)	40	102	62.0m	5.22	21.33	0.25	5.9
	(original assays)	'	'	62.0m	4.83	19.96	0.23	5.5
	historical intercept	114	166	52.0m	1.3	3.3	0.18	1.6
	(re-assayed section)	114	171	57.0m	1.20	3.44	0.18	1.5
	(original assays)	'	'	57.0m	1.24	3.53	0.17	1.6
GGY-005	historical intercept	12	162	150.0m	0.4	11.0	0.30	1.0
	(re-assayed section)	10	60	50.0m	0.45	19.23	0.33	1.2
	(original assays)	'	'	50.0m	0.51	21.74	0.44	1.5
	(re-assayed section)	64	98	34.0m	0.10	5.25	0.16	0.4
	(original assays)	'	'	34.0m	0.84	6.22	0.16	1.2
GGY-011	historical intercept	14	229	215.0m	0.2	9.6	0.36	0.9
	(re-assayed section)	14	126	112.0m	0.17	10.89	0.30	0.8
	(original assays)	'	'	112.0m	0.18	11.73	0.36	0.9
	(re-assayed section)	166	206	40.0m	0.09	5.08	0.22	0.5
	(original assays)	'	'	40.0m	0.09	4.90	0.22	0.5
GGY-017	historical intercept	69	184	115.0m	0.5	2.1	0.03	0.5
	(re-assayed section)	94	129	35.0m	0.45	2.76	0.04	0.6
	(original assays)	'	'	35.0m	0.30	4.01	0.03	0.4
	(re-assayed section)	206	258	52.0m	0.37	2.00	0.06	0.5
	(original assays)	'	'	52.0m	0.26	1.42	0.06	0.4
JDH-006	historical intercept	17.99	89.6	71.6m	0.2	2.0	0.10	0.4
	(re-assayed section)	10.3	81.3	71.0m	0.18	1.38	0.03	0.2
	(original assays)	'	'	71.0m	0.20	1.59	0.07	0.3

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary							
	historical intercept	164.8	281	116.2m	0.6	8.9	0.40	1.4	
	(re-assayed section)	150.6	281.1	130.5m	0.26	7.21	0.26	0.8	
	(original assays)	'	'	130.5m	0.42	8.02	0.36	1.1	
JDH-009	historical intercept	10.3	122	111.7m	0.7	14.6	0.58	1.8	
	(re-assayed section)	6.7	107.8	101.1m	0.21	13.80	0.36	1.0	
	(original assays)	'	'	101.1m	0.22	15.08	0.59	1.4	
JDH-10	historical intercept	1.5	50.9	49.4m	0.5	2.5	0.09	0.7	
	(re-assayed section)	15.2	50.9	35.7m	0.44	2.88	0.10	0.6	
	(original assays)	'	'	35.7m	0.41	2.96	0.10	0.6	
	historical intercept	140	203	81.6m	0.4	1.3	0.07	0.5	
	(re-assayed section)	150.5	203.4	52.9m	0.36	1.34	0.07	0.5	
	(original assays)	'	'	52.9m	0.39	1.24	0.06	0.5	
JDH-012	historical intercept	12.2	53.96	41.8m	0.6	6.5	0.02	0.7	
	(re-assayed section)	18.3	54	35.7m	0.68	7.62	0.02	0.8	
	(original assays)	'	'	35.7m	0.69	7.36	0.02	0.8	
JDH-013	historical intercept	89.9	154.9	65.0m	1.4	2.8	0.06	1.5	
	(re-assayed section)	112.3	155	42.7m	2.11	2.84	0.05	2.2	
	(original assays)	'	'	42.7m	2.00	3.70	0.08	2.2	
JDH-014	historical intercept	26.96	75.69	48.7m	0.4	5.2	0.10	0.6	
	(re-assayed section)	27	61.5	34.5m	0.64	5.99	0.13	0.9	
	(original assays)	'	'	34.5m	0.52	6.25	0.13	0.8	
	historical intercept	128.52	175.3	46.8m	0.46	3.3	0.08	0.6	
	(re-assayed section)	140.7	167.2	26.5m	0.26	2.24	0.07	0.4	
	(original assays)	'	'	26.5m	0.65	2.91	0.08	0.8	

Colorado V:  
A cut-off grade of 0.1 g/t Au was used to report the assays of re-samples core and channel samples from underground development with up to 10 metres of internal dilution below cut-off allowable for the reporting of significant intercepts, consistent with a large low-grade mineralized system. Intersections that use a different cut-off are indicated.

Colorado V drill hole results from re-sampling of available core:

Hole_id	From (m)	To (m)	Interval (m)	Au (g/t)	Ag (g/t)	Cu (ppm)	Mo (ppm)	Note
ZK0-1	9.4	37.5	28.1	0.4	1.0			
and	66.5	89.5	23.0	0.9	4.7			
and	105.7	129.7	24.0	0.3	1.0			
and	167.5	214.0	46.5	0.4	7.1			

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)



Criteria	JORC Code explanation		Commentary							
	inc	293.5	399.3	105.8	0.5	1.3	635	16		
	inc	214	215.5	1.5	1.8	2.1	681	12	1 g/t Au cut off	
	inc	344.5	399.3	54.8	0.7	1.5	767	12		
	inc	361.8	366.3	4.5	5.5	0.8	502	61	1 g/t Au cut off	
	and	397.8	399.3	1.5	1.3	2.3	770	2	1 g/t Au cut off	
	ZK1-13	46.2	73.2	27	0.1	0.8	306	1		
	and	140	141.5	1.5	1.9	0.7	236	1	1 g/t Au cut off	
	and	161	196	35	0.1	1.4	391	2		
	ZK0-5	6.1	19.8	13.7	0.2	1.3	313	10		
		46.3	130.1	83.8	0.5	1.2	356	7		
	inc	67	118	51	0.7	1.4	409	5	0.5 g/t Au cut off	
	inc	75.7	76.8	1.1	1.2	1.4	483	2	1 g/t Au cut off	
	and	80.7	81.7	1	1.8	2.2	549	4	1 g/t Au cut off	
	and	93.7	94.7	1	13.9	3.4	354	7	1 g/t Au cut off	
	and	146.5	296.5	150	0.2	1	310	3		
	and	370	371.5	1.5	0.9	5.2	1812	3		
	and	414.3	415.8	1.5	1.2	0.3	127	1		
	and	560.5	562	1.5	2.3	0.6	189	2		
	and	596	598.2	2.2	1.7	2.1	391	4		
	and	607	608.5	1.5	2	0.8	190	2		
	ZK18-1	NSI								
	ZK0-4	3.70	458.00	454.30*	0.20	1.3	0.04	5.9		
	inc	42.60	154.25	111.65	0.39	1.9	0.05	7.6	0.5 g/t AuEq cut off	
	inc	69.70	97.20	27.50	0.66	1.7	0.05	8.6	1.0 g/t AuEq cut off	
	ZK10-1	25.02	151.00	125.98	0.16	1.1	0.06	17.9	0.1 g/t AuEq cut off	
	and	309.00	326.00	17.00	0.16	0.91	0.07	6.1	0.1 g/t AuEq cut off	
	and	354.02	451.00	96.98*	0.17	1.2	0.06	15.8		
	inc	435.02	451.00	15.98*	0.32	1.8	0.07	2.6		
	ZK16-2	19.00	267.31	248.31	0.33	2.7	0.07	2.6	0.1 g/t AuEq cut off	
	inc	140.00	254.00	114.00	0.53	2.9	0.09	3.3	0.5 g/t AuEq cut off	
	inc	224.00	254.00	30.00	0.85	3.6	0.12	3.4	1.0 g/t AuEq cut off	
	* Mineralisation to end of hole									
	Colorado V channel sample results from underground exposure:									
	Channel_id	From	Interval	AuEq	Au	Ag	Cu	Mo	Comment	
		(m)	(m)	(g/t)	(g/t)	(g/t)	(%)	(ppm)		
	Main Adit	0.0	264.0	0.42	0.30	2.1	0.05	9.4	0.1 g/t AuEq cut off	

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
		inc 0.0 150.0 0.60 0.46 2.4 0.07 9.8 0.5 g/t AuEq cut off
		inc 0.0 112.0 0.71 0.55 2.7 0.08 9.3 1 g/t AuEq cut off
		and 276.0 32.0 0.29 0.21 1.4 0.04 5.1 0.1 g/t AuEq cut off
		Main Adit 20.0 39.1 0.30 0.28 2.3 0.03 4.5 0.1 g/t AuEq cut off (west drive)
		and 74.0 56.0 0.69 0.64 1.8 0.01 2.8 0.5 g/t AuEq cut off
		inc 84.0 46.0 0.81 0.76 2.1 0.01 3.0 1.0 g/t AuEq cut off
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>- <i>These relationships are particularly important in the reporting of Exploration Results.</i></li> <li>- <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></li> <li>- <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></li> </ul>	<ul style="list-style-type: none"> <li>- The geometry of the breccia hosted mineralisation appears to be predominantly vertical pipes while the geometry of the intrusive hosted mineralisation is not yet clear. The owner cautions that only and only the down hole lengths are reported and the true width of mineralisation is not known.</li> <li>- The preliminary interpretation is that the breccia hosted mineralisation occurs in near vertical breccia pipes. Thus, intersections in steeply inclined holes may not be representative of the true width of this breccia hosted mineralisation. The relationship between the drilling orientation and some of the key mineralised structures and possible reporting bias in terms of true width is illustrated in the figure below.</li> </ul>

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
<p><b>Diagrams</b></p>	<p>- Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</p>	<p>See section above</p>
<p><b>Balanced reporting</b></p>	<p>- Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and</p>	<p>- The reporting is fair and representative of what is currently understood of the geology of the project.</p>

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
	<i>high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	
<b>Other substantive exploration data</b>	<p>- <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<p><b>El Guayabo:</b></p> <p>Quantec Geophysical services conducted a SPARTAN Broadband Magnetotelluric and TITAN IP/EMAP surveys completed February 3rd to April 1st, 2019 over the El Guayabo property by Quantec Geoscience Ltd. on behalf of AAR Resources. The survey covered 16 square kilometers with data collected on 300m 3D spacing on a grid oriented at 10 degrees and 100 degrees. The grid was moved 10 degrees so the survey could be oriented perpendicular to the main geological structures. The survey involved a total of 205 Magnetotelluric (MT) sites and 2 test TITAN IP/EMAP profiles were surveyed. The final survey results to which will be delivered will consist of :</p> <ul style="list-style-type: none"> <li>• Inversion 2D products <ul style="list-style-type: none"> <li>• 2D model sections (for each line) of the:</li> <li>• DC resistivity model;</li> <li>• IP chargeability model using the DC resistivity model as a reference;</li> <li>• IP chargeability model using a half-space resistivity model as a reference;</li> <li>• MT(EMAP) resistivity model;</li> <li>• Joint MT+DC resistivity model; IP chargeability model using the MT+DC resistivity model;</li> </ul> </li> <li>• Inversion 3D products <ul style="list-style-type: none"> <li>• 3D MT model;</li> <li>• Cross-sections and Elevation Plan maps of the 3D MT models;</li> </ul> </li> </ul> <p>Figures showing Survey Locations and Results are included in the body of this release</p> <p><b>DCIP INVERSION PROCEDURES</b></p> <p>DCIP is an electrical method that uses the injection of current and the measurement of voltage difference along with its rate of decay to determine subsurface resistivity and chargeability respectively. Depth of investigation is mainly controlled by the array geometry but may also be limited by the received signal (dependent on transmitted current) and ground resistivity. Chargeability is particularly susceptible to data with a low signal-to-noise ratio. The differences in penetration depth between DC resistivity and chargeability are a function of relative property contrasts and relative signal-to-noise levels between the two measurements. A detailed introduction to DCIP is given in Telford, et al. (1976). The primary tool for evaluating data is through the inversion of the data in two or three dimensions. An inversion model depends not only on the data collected, but also on the associated data errors in the reading and the “model norm”. Inversion models are not unique and may contain “artefacts” from the inversion process. The inversion model may not accurately reflect all the information apparent in the actual data. Inversion models must be reviewed in context with the observed data, model fit, and with an understanding of the model norm used.</p> <p>The DC and IP inversions use the same mesh. The horizontal mesh is set as 2 cells between electrodes. The vertical mesh is designed with a cell thickness starting from 20 m for the first hundred metres to accommodate the topographic variation along the profiles, and then increases logarithmically with depth. The inversions were generally run for a maximum of 50 iterations. The DC data is inverted using an unconstrained 2D inversion with a homogenous half-space of average input data</p>

Criteria	JORC Code explanation	Commentary
		<p>as starting model. For IP inversions, the apparent chargeability <math>\rho</math> is computed by carrying out two DC resistivity forward models with conductivity distributions <math>\sigma(x_i, z_j)</math> and <math>(1-\eta)\sigma(x_i, z_j)</math> (Oldenburg and Li, 1994), where <math>(x_i, z_j)</math> specifies the location in a 2D mesh. The conductivity distributions used in IP inversions can be the inverted DC model or a half space of uniform conductivity. Two IP inversions are then calculated from the same data set and parameters using different reference models. The first inversion of the IP data uses the previously calculated DC model as the reference model and is labelled the IP dcref model. The second IP inversion uses a homogeneous half-space resistivity model as the reference model and is labelled IP hsref model. This model is included to test the validity of chargeability anomalies, and to limit the possibility of inversion artefacts in the IP model due to the use of the DC model as a reference. The results of this second IP inversion are presented on the digital archived attached to this report.</p> <p><b>MAGNETOTELLURIC INVERSIONS</b></p> <p>The Magnetotelluric (MT) method is a natural source EM method that measures the variation of both the electric (E) and magnetic (H) field on the surface of the earth to determine the distribution at depth of the resistivity of the underlying rocks. A complete review of the method is presented in Vozoff (1972) and Orange (1989).</p> <p>The measured MT impedance Z, defined by the ratio between the E and H fields, is a tensor of complex numbers. This tensor is generally represented by an apparent resistivity (a parameter proportional to the modulus of Z) and a phase (argument of Z). The variation of those parameters with frequency relates the variations of the resistivity with depth, the high frequencies sampling the sub-surface and the low frequencies the deeper part of the earth. However, the apparent resistivity and the phase have an opposite behaviour. An increase of the phase indicates a more conductive zone than the host rocks and is associated with a decrease in apparent resistivity. The objective of the inversion of MT data is to compute a distribution of the resistivity of the surface that explains the variations of the MT parameters, i.e. the response of the model that fits the observed data. The solution however is not unique and different inversions must be performed (different programs, different conditions) to test and compare solutions for artefacts versus a target anomaly.</p> <p>An additional parameter acquired during MT survey is the Tipper. Tipper parameters Tzx and Tzy (complex numbers) represent the transfer function between the vertical magnetic field and the horizontal X (Tzx), and Y (Tzy) magnetic fields respectively (as the impedance Z represent the transfer function between the electric and magnetic fields). This tipper is a 'local' effect, mainly defined by the lateral contrast of the resistivity. Consequently, the tipper can be used to estimate the geological strike direction. Another important use of the tipper is to display its components as vectors, named induction vectors. The induction vectors (defined by the real components of Tzx and Tzy) plotted following the Parkinson-Real-Reverse-Angle convention will point to conductive zones. The tipper is then a good mapping tool to delineate more conductive zones. The depth of investigation is determined primarily by the frequency content of the measurement. Depth estimates from any individual sounding may easily exceed 20 km. However, the data can only be confidently interpreted when the aperture of the array is comparable to the depth of investigation.</p> <p>The inversion model is dependent on the data, but also on the associated data errors and the model norm. The inversion models are not unique, may contain artefacts of the inversion process and may not therefore accurately reflect all the information apparent in the actual data. Inversion models need to be reviewed in context with the observed data, model fit. The user must understand the model norm used and evaluate whether the model is geologically plausible.</p>

Criteria	JORC Code explanation	Commentary																																
		<p>For this project, 2D inversions were performed on the TITAN/EMAP profiles data. For each profile, we assume the strike direction is perpendicular to the profile for all sites: the TM mode is then defined by the inline E-field (and cross line H-field); no TE mode (crossline E-field) were used in the 2D inversions.</p> <p>The 2D inversions were performed using the TM-mode resistivity and phase data interpolated at 6 frequencies per decade, assuming 10% and 5% error for the resistivity and phase respectively, which is equivalent to 5% error on the impedance component Z. No static shift of the data has been applied on the data.</p> <p>The 3D inversion was carried out using the CGG RLM-3D inversion code. The 3D inversions of the MT data were completed over an area of approximately 5km x 3.5km. All MT sites from this current survey were used for the 3D inversion.</p> <p>The 3D inversion was completed using a sub sample of the MT data with a maximum of 24 frequencies at each site covering the measured data from 10 kHz to 0.01 Hz with a nominal 4 frequencies per decade. At each site, the complete MT complex impedance tensors (Zxx, Zxy, Zyx, and Zyy) were used as input data with an associated error set to 5% on each parameter. The measured tipper data (Tzx, Tzy) were also used as input data with an associated error set to 0.02 on each parameter. A homogenous half space with resistivity of 100 Ohm-m was used as the starting model for this 3D MT inversion. A uniform mesh with 75 m x 75 m cell size was used in horizontal directions in the resistivity model. The vertical mesh was defined to cover the first 4 km. Padding cells were added in each direction to accommodate the inversion for boundary conditions. The 3D inversion was run for a maximum of 50 iterations.</p> <p>In addition a total of 129 samples distributed along 12 holes were analysed to measure the resistivity (Rho (Ohm*m) and chargeability properties (Chargeability M and Susceptibility (SCPT 0.001 SI) . The equipment used for the analyses was the Sample Core IP Tester, manufactured by Instrumentation GDD Inc. It should be noted that these measures should be taken only as first order estimate, and not as “absolute” (true) value as readings by the field crew were not repeated and potentially subject to some errors (i.e. wrong size of the core entered in the equipment).</p> <p><b>Colorado V:</b> Exploration Target: An Exploration Target for two mineralized zones on the Colorado V mining concession has been made using surface gold in soil anomalies, drill hole geological and assay information and panel sampling from an adit at one of the targets.</p> <table border="1"> <thead> <tr> <th>Exploration Target Anomaly A</th> <th>Unit</th> <th>Low estimate</th> <th>High Estimate</th> </tr> </thead> <tbody> <tr> <td>Surface area (100 ppb Au in soil envelope):</td> <td>m<sup>2</sup></td> <td>250000</td> <td>250000</td> </tr> <tr> <td>Depth</td> <td>m</td> <td>400</td> <td>400</td> </tr> <tr> <td>Bulk Density</td> <td>kg/m<sup>3</sup></td> <td>2600</td> <td>2750</td> </tr> <tr> <td>Tonnage</td> <td>Mt</td> <td>260</td> <td>275</td> </tr> <tr> <td>Grade Au</td> <td>g/t</td> <td>0.4</td> <td>0.7</td> </tr> <tr> <td>Grade Ag</td> <td>g/t</td> <td>1.5</td> <td>2.5</td> </tr> <tr> <td>tonnage above cut-off</td> <td>%</td> <td>70%</td> <td>90%</td> </tr> </tbody> </table>	Exploration Target Anomaly A	Unit	Low estimate	High Estimate	Surface area (100 ppb Au in soil envelope):	m <sup>2</sup>	250000	250000	Depth	m	400	400	Bulk Density	kg/m <sup>3</sup>	2600	2750	Tonnage	Mt	260	275	Grade Au	g/t	0.4	0.7	Grade Ag	g/t	1.5	2.5	tonnage above cut-off	%	70%	90%
Exploration Target Anomaly A	Unit	Low estimate	High Estimate																															
Surface area (100 ppb Au in soil envelope):	m <sup>2</sup>	250000	250000																															
Depth	m	400	400																															
Bulk Density	kg/m <sup>3</sup>	2600	2750																															
Tonnage	Mt	260	275																															
Grade Au	g/t	0.4	0.7																															
Grade Ag	g/t	1.5	2.5																															
tonnage above cut-off	%	70%	90%																															

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary																																																								
		Contained Au																																																								
		Contained Ag																																																								
		<table border="1"> <thead> <tr> <th>Exploration Target Anomaly B</th> <th>Unit</th> <th>Low estimate</th> <th>High Estimate</th> </tr> </thead> <tbody> <tr> <td>Surface area (100 ppb Au in soil envelope):</td> <td>m<sup>2</sup></td> <td>175000</td> <td>175000</td> </tr> <tr> <td>Depth</td> <td>m</td> <td>400</td> <td>400</td> </tr> <tr> <td>Bulk Density</td> <td>kg/m<sup>3</sup></td> <td>2600</td> <td>2750</td> </tr> <tr> <td>Tonnage</td> <td>Mt</td> <td>182</td> <td>193</td> </tr> <tr> <td>Grade Au</td> <td>g/t</td> <td>0.4</td> <td>0.7</td> </tr> <tr> <td>Grade Ag</td> <td>g/t</td> <td>1.5</td> <td>2.5</td> </tr> <tr> <td>% tonnage above cut-off</td> <td>%</td> <td>70%</td> <td>90%</td> </tr> <tr> <td>Contained Au</td> <td>Moz</td> <td>1.6</td> <td>3.9</td> </tr> <tr> <td>Contained Ag</td> <td>Moz</td> <td>6.1</td> <td>13.9</td> </tr> <tr> <td><b>Total of Target A &amp; B</b></td> <td><b>Unit</b></td> <td><b>Low estimate</b></td> <td><b>High Estimate</b></td> </tr> <tr> <td>Tonnage</td> <td>Mt</td> <td>442</td> <td>468</td> </tr> <tr> <td>Contained Au</td> <td>Moz</td> <td>4.0</td> <td>9.5</td> </tr> <tr> <td>Contained Ag</td> <td>Moz</td> <td>14.9</td> <td>33.8</td> </tr> </tbody> </table>	Exploration Target Anomaly B	Unit	Low estimate	High Estimate	Surface area (100 ppb Au in soil envelope):	m <sup>2</sup>	175000	175000	Depth	m	400	400	Bulk Density	kg/m <sup>3</sup>	2600	2750	Tonnage	Mt	182	193	Grade Au	g/t	0.4	0.7	Grade Ag	g/t	1.5	2.5	% tonnage above cut-off	%	70%	90%	Contained Au	Moz	1.6	3.9	Contained Ag	Moz	6.1	13.9	<b>Total of Target A &amp; B</b>	<b>Unit</b>	<b>Low estimate</b>	<b>High Estimate</b>	Tonnage	Mt	442	468	Contained Au	Moz	4.0	9.5	Contained Ag	Moz	14.9	33.8
Exploration Target Anomaly B	Unit	Low estimate	High Estimate																																																							
Surface area (100 ppb Au in soil envelope):	m <sup>2</sup>	175000	175000																																																							
Depth	m	400	400																																																							
Bulk Density	kg/m <sup>3</sup>	2600	2750																																																							
Tonnage	Mt	182	193																																																							
Grade Au	g/t	0.4	0.7																																																							
Grade Ag	g/t	1.5	2.5																																																							
% tonnage above cut-off	%	70%	90%																																																							
Contained Au	Moz	1.6	3.9																																																							
Contained Ag	Moz	6.1	13.9																																																							
<b>Total of Target A &amp; B</b>	<b>Unit</b>	<b>Low estimate</b>	<b>High Estimate</b>																																																							
Tonnage	Mt	442	468																																																							
Contained Au	Moz	4.0	9.5																																																							
Contained Ag	Moz	14.9	33.8																																																							
		<p>The potential quantity and grade of the Colorado V Exploration Target is conceptual in nature. There has been insufficient exploration to estimate a Mineral Resource and that it is uncertain if further exploration will result in the estimation of a Mineral Resource.</p> <p>The following is an explanation of the inputs used in formulating the Exploration Target.</p> <ul style="list-style-type: none"> <li>• Surface Area: The surface area of the target has been estimated by projecting drill hole gold significant intersections vertically to the surface. The surface projection of the intersections in the drill holes coincides with the 100 ppb Au gold-in-soil anomaly contour. This area has been used to estimate the horizontal extent of the mineralization.</li> <li>• Depth: A depth of 400 metres from surface has been used as an estimate of the depth that an open pit and underground bulk tonnage mining project would be expected to extend. The mineralization at Colorado V is controlled by steeply plunging / dipping intrusions and breccia which is expected to extend to at least 400m depth from surface.</li> <li>• Bulk Density: The bulk density is based on geological observations of the rocks that host the mineralization. Typical</li> </ul>																																																								

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

Issued Capital  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

Australian Registered Office  
Level 1  
1205 Hay Street  
West Perth WA 6005

Directors  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

Contact  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)

Criteria	JORC Code explanation	Commentary
		<p>bulk densities for these rock types are in the range used.</p> <ul style="list-style-type: none"> <li>• Gold and Silver grades: The gold and silver grade range has been estimated from the weighted average and median sample grades and deviations from mean from drill core and underground panel sampling.</li> <li>• Proportion of tonnage above cut-off grade: These values are estimates based on drill hole intersection grade continuity down-hole assuming that not all of the Target volume, if sampled would be above the economic cut-off grade.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>- <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></li> <li>- <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<p><b>El Guaybo Project</b></p> <ul style="list-style-type: none"> <li>- Re-logging and re-assaying core including SWIR/alteration mapping to better vector on the porphyry and breccia targets – available assays 6 elements only, no SWIR, and not logged by porphyry experts.</li> <li>- Helicopter magnetic survey on east-west flight lines with 50m spacing, processing and interpretation of these data.</li> <li>- Channel sampling of the adit and artisanal workings - &gt; 1km of underground exposure of the system which has never been systematically mapped or sampled.</li> <li>- Sampling of additional breccia bodies – only 2 of the 10 known breccias have been systematically defined and properly sampled.</li> <li>- Complete interpretation of the 3D MT survey (with IP lines) covering 16 sq. This will include integration of all the geological data and constrained inversion modelling</li> <li>- The aim of the program above is to define targets for a drilling program</li> </ul> <p><b>Colorado V Project</b></p> <ul style="list-style-type: none"> <li>- Re-logging and re-assaying of drill core where only partial gold assays are available.</li> <li>- Helicopter magnetic survey on east-west flight lines with 50m spacing, processing and interpretation of these data.</li> <li>- Channel sampling of mineralized exposures in the adits and underground workings.</li> <li>- Surface mapping and sampling.</li> <li>- Compile and integrate existing soil survey data with CEL's MMI soil survey covering 16 sq kms. Additional soil geochemical sampling (MMI and c-horizon) to be completed near main anomalies</li> <li>- The aim of the program above is to further test the Exploration Targets and identify targets for drilling.</li> </ul>

Challenger Exploration Limited  
ACN 123 591 382  
ASX: **CEL**  
Website: [www.challengerex.com](http://www.challengerex.com)

**Issued Capital**  
653.1m shares  
86.6m options  
120m perf shares  
16m perf rights

**Australian Registered Office**  
Level 1  
1205 Hay Street  
West Perth WA 6005

**Directors**  
Mr Kris Knauer, MD and CEO  
Mr Scott Funston, Finance Director  
Mr Fletcher Quinn, Chairman

**Contact**  
T: +61 8 6380 9235  
E: [admin@challengerex.com](mailto:admin@challengerex.com)